

DIGITUS DIGITUS mini GBIC (SFP) Module, 10Gbps, 0.3km

DN-81200
EAN 4016032324133



10G SFP+ Module, Multimode, DDM LC Duplex Connector, 850nm, up to 300m

O módulo transceptor DIGITUS® Mini GBIC (SFP) proporciona alta qualidade e fiabilidade. Quer seja a partir de interruptor para interruptor, conversor para interruptor, conversor para conversor ou qualquer outra aplicação: a vasta gama de módulos DIGITUS® permite a utilização flexível da tecnologia de fibra ótica. A conformidade com a norma MSA (Multi Source Agreement) garante a compatibilidade com fabricantes terceiros.

A ligação de fibra ótica Plug and Play

- Módulo Mini GBIC SFP (Small Form Factor Pluggable)
- Compatível os seguintes fabricantes: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- Suporta DDM (Digital Diagnostic Monitoring)
- Alta qualidade e excelente proteção contra falhas
- 10 Gbps Maximum Data Rate
- Compliant to IEEE802.3ae 10 Gigabit Standard
- Produto laser de classe 1 em conformidade com a EN 60825-1
- Instalação Plug and Play simples

- Compatível com a norma MSA (Multi Source Agreement)
- Hot pluggable
- Ligação: 1x LC Duplex
- Comprimento de onda: 850nm
- Transmission Power: Minimum -5 dBm, Maximum -1 dBm
- Sensitivity Receiving Power: Minimum -11.5 dBm
- For a distance of up to 0.3km
- Mecanismo de bloqueio seguro e rápido
- Fonte de alimentação 3,3 V
- Temperatura de funcionamento: 0°C-70°C

Attributes

- Mode: Multimode
- Connector: LC
- Distance (km): 0.3
- Wavelength: 850 nm
- DDM Support: yes
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Cisco
- Ethernet speed: 10 Gigabit

Package contents


- Módulo SFP

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	0.80	41.00	26.00	16.00	17,056.00
Packaging Unit Inside	1	0.04	3.00	11.50	9.00	310.50
Packaging Unit Single	1	0.04	3.00	11.50	9.00	310.50
Net single without Packaging	1	0.03	5.50	1.20	0.80	0.00

More images:



SFP Modules						
Part Number	SKU Code	Speed	Distance	Connector	Mounting	Operating Temperature
284-1000	4010000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1001	4010000000001	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1002	4010000000002	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1003	4010000000003	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1004	4010000000004	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1005	4010000000005	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1006	4010000000006	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1007	4010000000007	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1008	4010000000008	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1009	4010000000009	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1010	4010000000010	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1011	4010000000011	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1012	4010000000012	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1013	4010000000013	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1014	4010000000014	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1015	4010000000015	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1016	4010000000016	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1017	4010000000017	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1018	4010000000018	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1019	4010000000019	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1020	4010000000020	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1021	4010000000021	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1022	4010000000022	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1023	4010000000023	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1024	4010000000024	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1025	4010000000025	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1026	4010000000026	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1027	4010000000027	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1028	4010000000028	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1029	4010000000029	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1030	4010000000030	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1031	4010000000031	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1032	4010000000032	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1033	4010000000033	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1034	4010000000034	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1035	4010000000035	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1036	4010000000036	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1037	4010000000037	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1038	4010000000038	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1039	4010000000039	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1040	4010000000040	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1041	4010000000041	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1042	4010000000042	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1043	4010000000043	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1044	4010000000044	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1045	4010000000045	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1046	4010000000046	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1047	4010000000047	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1048	4010000000048	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1049	4010000000049	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1050	4010000000050	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1051	4010000000051	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1052	4010000000052	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1053	4010000000053	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1054	4010000000054	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1055	4010000000055	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1056	4010000000056	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1057	4010000000057	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1058	4010000000058	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1059	4010000000059	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1060	4010000000060	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1061	4010000000061	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1062	4010000000062	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1063	4010000000063	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1064	4010000000064	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1065	4010000000065	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1066	4010000000066	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1067	4010000000067	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1068	4010000000068	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1069	4010000000069	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1070	4010000000070	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1071	4010000000071	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1072	4010000000072	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1073	4010000000073	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1074	4010000000074	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1075	4010000000075	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1076	4010000000076	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1077	4010000000077	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1078	4010000000078	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1079	4010000000079	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1080	4010000000080	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1081	4010000000081	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1082	4010000000082	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1083	4010000000083	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1084	4010000000084	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1085	4010000000085	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1086	4010000000086	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1087	4010000000087	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1088	4010000000088	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1089	4010000000089	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1090	4010000000090	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1091	4010000000091	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1092	4010000000092	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1093	4010000000093	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1094	4010000000094	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1095	4010000000095	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1096	4010000000096	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1097	4010000000097	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1098	4010000000098	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1099	4010000000099	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C
284-1100	4010000000100	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	19mm	-40 to 70 °C

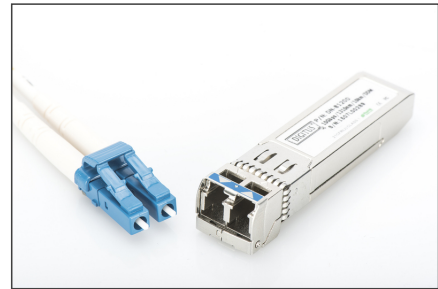

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com