

DIGITUS DIGITUS mini GBIC (SFP) Module, 10Gbps, 0.3km

DN-81200
EAN 4016032324133



10G SFP+ Module, Multimode, DDM LC Duplex Connector, 850nm, up to 300m

O módulo transceptor DIGITUS® Mini GBIC (SFP) proporciona alta qualidade e fiabilidade. Quer seja a partir de interruptor para interruptor, conversor para interruptor, conversor para conversor ou qualquer outra aplicação: a vasta gama de módulos DIGITUS® permite a utilização flexível da tecnologia de fibra ótica. A conformidade com a norma MSA (Multi Source Agreement) garante a compatibilidade com fabricantes terceiros.

A ligação de fibra ótica Plug and Play

- Módulo Mini GBIC SFP (Small Form Factor Pluggable)
- Compatível os seguintes fabricantes: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- Suporta DDM (Digital Diagnostic Monitoring)
- Alta qualidade e excelente proteção contra falhas
- 10 Gbps Maximum Data Rate
- Compliant to IEEE802.3ae 10 Gigabit Standard
- Produto laser de classe 1 em conformidade com a EN 60825-1
- Instalação Plug and Play simples

- Compatível com a norma MSA (Multi Source Agreement)
- Hot pluggable
- Ligação: 1x LC Duplex
- Comprimento de onda: 850nm
- Transmission Power: Minimum -5 dBm, Maximum -1 dBm
- Sensitivity Receiving Power: Minimum -11.5 dBm
- For a distance of up to 0.3km
- Mecanismo de bloqueio seguro e rápido
- Fonte de alimentação 3,3 V
- Temperatura de funcionamento: 0°C~70°C
- Mode: Multimode
- Connector: LC
- Distance (km): 0.3
- Wavelength: 850 nm
- DDM Support: yes
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Cisco
- Ethernet speed: 10 Gigabit


Package contents

- Módulo SFP

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	0.80	41.00	26.00	16.00	17,056.00
Packaging Unit Inside	1	0.04	3.00	11.50	9.00	310.50
Packaging Unit Single	1	0.04	3.00	11.50	9.00	310.50
Net single without Packaging	1	0.03	5.50	1.20	0.80	0.00

More images:

SFP Modules						
Part Number	SKU Code	Speed	Distance	Connector	Wavelength	Operating Temperature
250-0100	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0101	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0102	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0103	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0104	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0105	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0106	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0107	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0108	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0109	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0110	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0111	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0112	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0113	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0114	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0115	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0116	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0117	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0118	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0119	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0120	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0121	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0122	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0123	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0124	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0125	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0126	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0127	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0128	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0129	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0130	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0131	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0132	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0133	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0134	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0135	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0136	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0137	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0138	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0139	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0140	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0141	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0142	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0143	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0144	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0145	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0146	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0147	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0148	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0149	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0150	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0151	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0152	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0153	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0154	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0155	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0156	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0157	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0158	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0159	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0160	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0161	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0162	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0163	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0164	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0165	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0166	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0167	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0168	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0169	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0170	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0171	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0172	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0173	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0174	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0175	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0176	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0177	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0178	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0179	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0180	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0181	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0182	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0183	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0184	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0185	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0186	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0187	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0188	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0189	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0190	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0191	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0192	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0193	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0194	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0195	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0196	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0197	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C
250-0198	4010000000000	10000 Gbps	10 km	LC Duplex	1310 nm	0 to 70 °C
250-0199	4010000000000	10000 Gbps	10 km	LC Duplex	1550 nm	0 to 70 °C

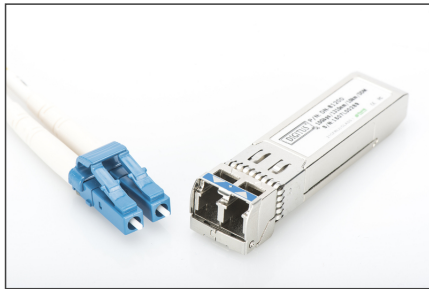

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com