

# DIGITUS DIGITUS mini GBIC (SFP) модуль, 10 Гбитс, 10.0 км

DN-81201  
EAN 4016032324140



**10G SFP+ Module, Singlemode, DDM LC Duplex Connector, 1310nm, up to 10km**

Модули трансиверов DIGITUS® Mini GBIC (SFP) обеспечивают наивысшее качество и надежность. Будь то соединение между коммутаторами, между конвертером и коммутатором, между конвертерами или другие, обширные возможности применения: Большое разнообразие модулей DIGITUS® позволяет гибко использовать технологию стекловолокна. Благодаря соответствию стандарту MSA (Multi Source Agreement) обеспечивается совместимость с о сторонними производителями.

**Стекловолоконное соединение Plug and Play**

- Модуль Mini GBIC SFP (компактный приёмопередатчик)
- Совместим с устройствами следующих производителей: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik , ENTERASYS, RIVERSTONE , Unifi, Ubiquiti, ZyXEL, ZTE
- Поддерживает DDM (Digital Diagnostic Monitoring)
- Высокое качество и максимальная отказоустойчивость
- 10 Gbps Maximum Data Rate
- Compliant to IEEE802.3ae 10 Gigabit Standard


- Класс 1 лазерный продукт по EN 60825-1
- Простая установка Plug and Play
- Совместим со стандартом MSA (сетевое соглашение)
- С возможностью оперативной замены
- Тип подключения: 1 дуплекс LC
- Длина волны: 1310 нм
- Мощность передатчика: не менее -8 дБм, макс. -0,5 дБм
- Чувствительность приемника, не менее -12.5 дБм
- Для расстояния до 10 км
- Надежный быстродействующий механизм
- Рабочая температура: 0-70 °C
- Mode: Singlemode
- Connector: LC
- Distance (km): 10
- Wavelength: 1310 nm
- DDM Support: yes
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA)
- Ethernet speed: 10 Gigabit

**Package contents**

- Модуль SFP

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	2.00	41.00	26.00	16.00	17,056.00
Packaging Unit Inside	1	0.10	3.00	11.50	9.00	310.50
Packaging Unit Single	1	0.10	3.00	11.50	9.00	310.50
Net single without Packaging	1	0.03	5.50	1.20	0.80	0.00

More images:

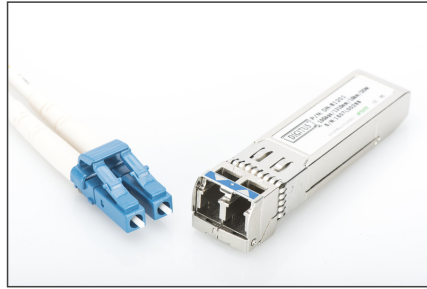

SFP Modules							
Part Number	Rate	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Model
<b>Fast Ethernet</b>							
DS-4814	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-1	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-2	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
<b>SFP+</b>							
DS-4815	10000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4815-1	10000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4815-2	10000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4815-3	10000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4815-4	10000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
<b>10G</b>							
DS-4816	10000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4816-1	10000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
<b>Fast Ethernet</b>							
DS-4814	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-1	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-2	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-3	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-4	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-5	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-6	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-7	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-8	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-9	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-10	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-11	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-12	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-13	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-14	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-15	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-16	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-17	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-18	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-19	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓
DS-4814-20	1000000000	10 Gbps	10 km	LC Duplex Small Form-factor Pluggable	1310nm	0 to 70 °C	✓