

# DIGITUS Соединительный аудиокаб., стерео

AK-510100-015-S  
EAN 4016032324973



**Audio connection cable, stereo 3.5mm 1.50m, CCS, 2x0.10/10, M/M, black**

Соединительный кабель со штыревым разъемом 3,5 мм для подключения, например, плеера MP3 или смартфона к стереосистеме или разъему автомагнитолы 3,5 мм.



- 3,5мм вилка <=> 3,5мм вилка
- Залитой корпус
- Проводники из омедненной стали
- Цвет: черный

**Attributes**

- Assortment: Audio Cables
- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: 3.5mm stereo plug
- Connector 2: 3.5mm stereo plug
- Hoods: molded
- Packaging: Polybag
- Wire material: BC
- Length: 1.5 m
- Shielding: Unshielded

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 300          | 13.00       | 39.00      | 32.50      | 26.50       | 33,588.80       |
| Packaging Unit Inside        | 5            | 0.22        | 20.00      | 16.00      | 7.00        | 2,240.00        |
| Packaging Unit Single        | 1            | 0.04        | 12.50      | 3.60       | 1.50        | 67.50           |
| Net single without Packaging | 1            | 0.04        | 12.50      | 3.60       | 1.50        | 0.00            |

**More images:**

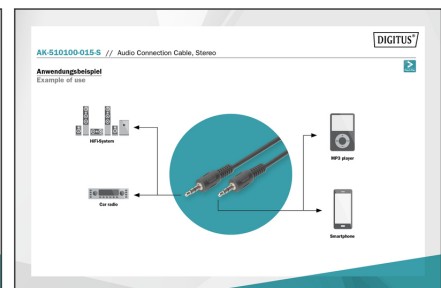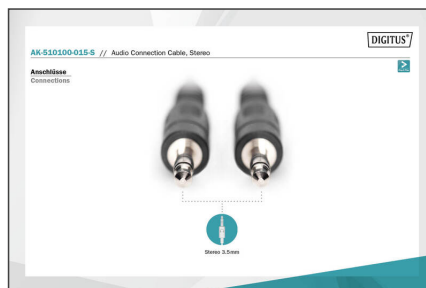

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)