

DIGITUS DisplayPort Connection Cable

AK-340103-010-S
EAN 4016032329428



DisplayPort Connection Cable, Type DP M/M, 1.0m, w/interlock, Full HD, DP 1.1a conf., bl

This high performance HD digital audio and video cable for example is used to connect a PC or notebook with DisplayPort interface to a monitor with DisplayPort interface.


Ideal for CAD/CAM, GIS, 3D modeling, real time simulation, and more.

- Full HD resolution up to 1080p
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3

- Assortment: DisplayPort Cables
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DP, plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- HDTV Resolution max.: 1920 x 1080 Pixel, 60Hz
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: Snap fastener
- Length: 1 m
- AOC - Active Optical Cable: no

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 140 | 8.40 | 50.00 | 32.00 | 21.00 | 33,600.00 |
| Packaging Unit Inside | 10 | 0.60 | 18.00 | 7.00 | 11.00 | 1,386.00 |
| Packaging Unit Single | 1 | 0.06 | 12.50 | 1.50 | 12.50 | 234.38 |
| Net single without Packaging | 1 | 0.06 | 1.50 | 15.00 | 24.00 | 0.00 |

More images:

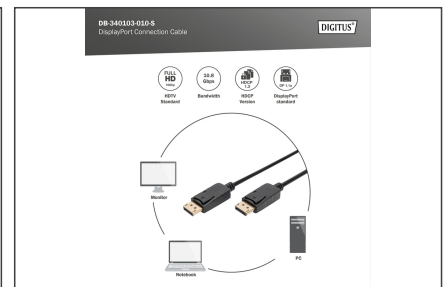

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com