

DIGITUS Cabo de instalação CAT 6 U-UTP DIGITUS®, não preparado

DK-1613-VH-5
EAN 4016032343660



CAT 6 U-UTP installation cable, 250 MHz Eca (EN 50575), AWG 23/1, 500 m drum, sx, purple

The Digitus Cat 6 U/UTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-6-1, DIN EN 50173, IEC 60332-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+.


Melhor desempenho e melhor qualidade de ligação com a rede.

- Isolamento: HD-PE
- Número total de condutores isolados: 8, entrançados em 4 pares

- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco
- Revestimento geral: nenhum
- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: U-UTP, unshielded
- CPR: Eca
- Length: 500 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	22.00	39.50	38.00	27.50	41,277.50
Packaging Unit Inside	1	22.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	22.00	37.00	37.00	31.00	42,439.00
Net single without Packaging	1	19.00	33.00	34.00	12.00	0.00

More images:

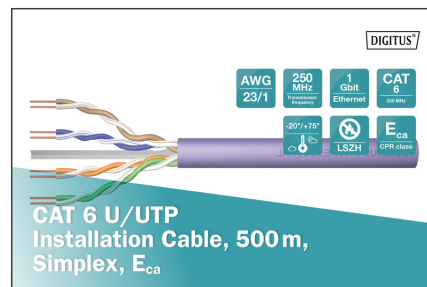

DK-1613-VH-5 // CAT 6 U/UTP Installation Cable, 500m, Simplex, E_a

Anwendungsbeispiel
Example of use

DK-1613-VH-5 // CAT 6 U/UTP Installation Cable, 500m, Simplex, E_a

Kabelquerschnitt
Cable cross section

Labels: Außenmantel Outer jacket, Drähtw. Drain wires, Adresspaar Twisted pair

Digitus-Produktions-Produktinformation

Produktbeschreibung	Head Center, Simplex, Flat, 100% Recycled, Shielded, Simplex, Shielded, Flat, 100% Recycled	Physikalische Spezifikationen/Physical Properties	UWG
Bestandteile	Head Center, Simplex, Flat, 100% Recycled	Leistungseigenschaften/Performance	1000MHz
Technische Spezifikationen/Technical Specifications	Head Center, Simplex, Flat, 100% Recycled	Leistungseigenschaften/Performance	1000MHz

Leistungseigenschaften/Transmission Properties

Parameter	Unit	Value	Parameter	Unit	Value	Parameter	Unit	Value
Attenuation	dB/100m	18.5	Attenuation	dB/100m	18.5	Attenuation	dB/100m	18.5
Return Loss	dB	20	Return Loss	dB	20	Return Loss	dB	20

Digitus-Produktions-Produktinformation

UWG	1000MHz	Leistungseigenschaften/Performance	1000MHz
Leistungseigenschaften/Performance	1000MHz	Leistungseigenschaften/Performance	1000MHz

Digitus-Produktions-Produktinformation

