

DIGITUS Cabo de instalação CAT 6 U-UTP DIGITUS®, não preparado

DK-1613-VH-5
EAN 4016032343660



CAT 6 U-UTP installation cable, 250 MHz Eca (EN 50575), AWG 23/1, 500 m drum, sx, purple

The Digitus Cat 6 U/UTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-6-1, DIN EN 50173, IEC 60332-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+.

Melhor desempenho e melhor qualidade de ligação com a rede.

- Isolamento: HD-PE
- Número total de condutores isolados: 8, entrançados em 4 pares


- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco
- Revestimento geral: nenhum



Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: U-UTP, unshielded
- CPR: Eca
- Length: 500 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	22.00	39.50	38.00	27.50	41,277.50
Packaging Unit Inside	1	22.00	0.00	0.00	0.00	0.00
Packaging Unit Single	1	22.00	37.00	37.00	31.00	42,439.00
Net single without Packaging	1	19.00	33.00	34.00	12.00	0.00

More images:

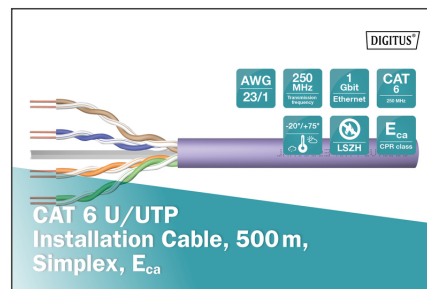

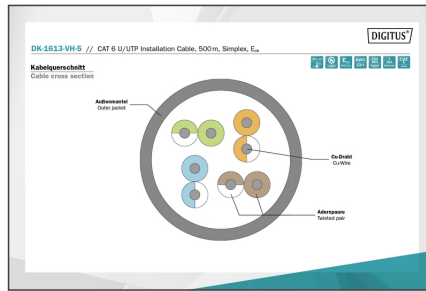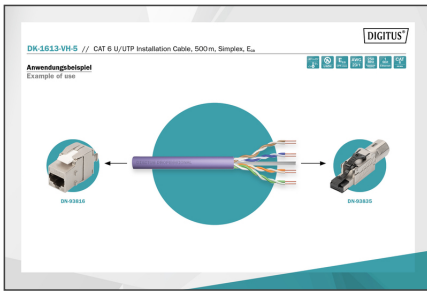

Technische Daten / Technical Data		Physikalische Spezifikationen / Physical Properties	
Bezeichnung / Name	DK-1613-VH-S // CAT 6 U/UTP Installation Cable, 500m, Simplex, E6	Code / Code	1613-VH-S
Hersteller / Manufacturer	ASSMANN Electronic GmbH	Leitung / Conductor	4x4 Adress Paare / 4x4 Adress Pairs
Material / Material	ABS / ABS	Leitung / Conductor	28 AWG / 0,25 mm
Farbe / Color	Violett / Violet	Leitung / Conductor	28 AWG / 0,25 mm
Strombelastbarkeit / Current Rating	10 A / 10 A	Leitung / Conductor	28 AWG / 0,25 mm
Spannung / Voltage	250 V / 250 V	Leitung / Conductor	28 AWG / 0,25 mm
Leistung / Power	10 W / 10 W	Leitung / Conductor	28 AWG / 0,25 mm
Wärmeleitfähigkeit / Thermal Conductivity	0,4 W/mK / 0,4 W/mK	Leitung / Conductor	28 AWG / 0,25 mm
Wärmeausdehnungskoeffizient / Coefficient of Thermal Expansion	16,6 10 ⁻⁶ / 16,6 10 ⁻⁶	Leitung / Conductor	28 AWG / 0,25 mm
Wärmeleitfähigkeit / Thermal Conductivity	0,4 W/mK / 0,4 W/mK	Leitung / Conductor	28 AWG / 0,25 mm
Wärmeausdehnungskoeffizient / Coefficient of Thermal Expansion	16,6 10 ⁻⁶ / 16,6 10 ⁻⁶	Leitung / Conductor	28 AWG / 0,25 mm
Wärmeleitfähigkeit / Thermal Conductivity	0,4 W/mK / 0,4 W/mK	Leitung / Conductor	28 AWG / 0,25 mm
Wärmeausdehnungskoeffizient / Coefficient of Thermal Expansion	16,6 10 ⁻⁶ / 16,6 10 ⁻⁶	Leitung / Conductor	28 AWG / 0,25 mm

Leitungsgruppen Transmission Properties									
PAIRS	UTP	STP	SHIELD	PLAID	PLAID	PL	SHIELD	SHIELD	SHIELD
1	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0	1,0
2	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4	1,4
3	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8	1,8
4	2,2	2,2	2,2	2,2	2,2	2,2	2,2	2,2	2,2
5	2,6	2,6	2,6	2,6	2,6	2,6	2,6	2,6	2,6
6	3,0	3,0	3,0	3,0	3,0	3,0	3,0	3,0	3,0
7	3,4	3,4	3,4	3,4	3,4	3,4	3,4	3,4	3,4
8	3,8	3,8	3,8	3,8	3,8	3,8	3,8	3,8	3,8
9	4,2	4,2	4,2	4,2	4,2	4,2	4,2	4,2	4,2
10	4,6	4,6	4,6	4,6	4,6	4,6	4,6	4,6	4,6


UPP Position: 1+ 2+ 3+ 4+ 5+ 6+ 7+ 8+ 9+ 10+

Leitungsgruppen: 1+ 2+ 3+ 4+ 5+ 6+ 7+ 8+ 9+ 10+

Leitungsgruppen: 1+ 2+ 3+ 4+ 5+ 6+ 7+ 8+ 9+ 10+

Leitungsgruppen: 1+ 2+ 3+ 4+ 5+ 6+ 7+ 8+ 9+ 10+

Leitungsgruppen: 1+ 2+ 3+ 4+ 5+ 6+ 7+ 8+ 9+ 10+

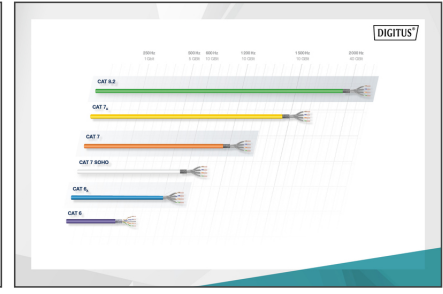

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
 info@assmann.com