


# DIGITUS Fiber Optic Patchcord, MPO, Female, OS2, Method A, 1m

DK-2966-01

EAN 4016032345121

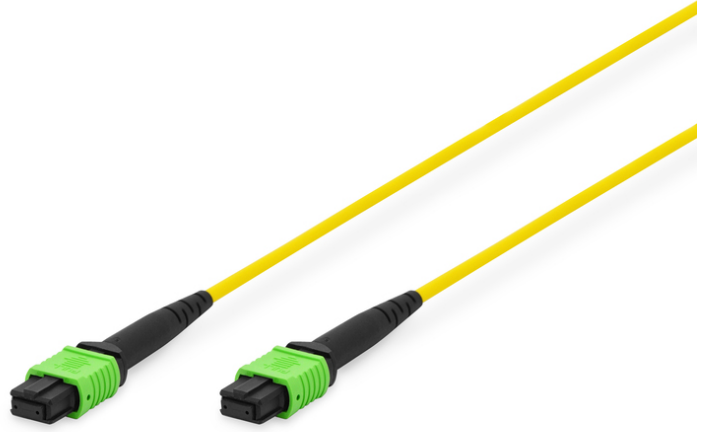

## Fiber Optic Patchcord, MPO to MPO, Female OS2, SM 09/125 æ, 1m, APC, Method A, yellow/green

The MPO patch cable allows datarates of 40Gb/s or 100Gb/s and is the answer of the needed growing bandwidths of datacenters. The standardized IEC61754-7 and TIA/EIA 604-5 MPO Plug guaranteed the best performance in the whole network and is hardly larger than an standard RJ45 plug. The excellent damping and the compact design makes this patch cable to the first choice, if we talk about bandwidth and performance.

### Ađınız için mükemmel performans ve bağlantı kalitesi.

- Connector : MPO female
- Polish : APC
- Type : Method A
- Fibre type : SM-G652D, 9/125µ, OS2
- Fiber Count : 12
- Cable outer diameter : 3 mm
- Sheath colour : Yellow
- Cable length : 1 m

- Outer sheath material : LSZH
- Max. Tensile strength : 300 N
- Min. bending radius : 30 mm
- Temperature range : -40°C till +75°C
- Fiber çapı: 9/125 µ
- Fiber sayısı: 12
- Fiber sınıfı: OS2
- Kablo çapı: 3 mm
- Kablo kılıfı: LSOH
- Konektör sayısı taraf 1: 1
- Konektör sayısı taraf 2: 1
- Mod: Tek modlu
- Paket: DIGITUS Polietilen Torba
- Renkli kablo: sarı
- Uzunluk: 1 m

### Package contents

- 1 x Fiber Optic Patchcord, MPO, Female, OS2, Method A, 1m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	400	5.47	40.00	40.00	30.00	48,000.00
Packaging Unit Inside	1	0.01	1.00	20.00	29.00	580.00
Packaging Unit Single	1	0.01	1.00	20.00	29.00	580.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00