


DIGITUS Cat.7 S/FTP installation cable, 500 m, simplex, Dca-s1a d1 a1

DK-1743-VH-5
 EAN 4016032353997

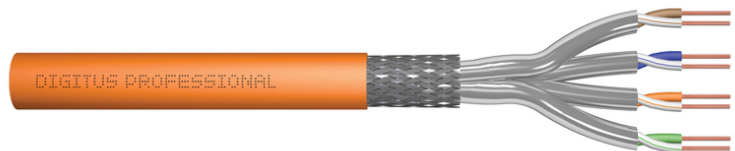

CAT 7 S-FTP installation cable, 1200 MHz Dca (EN 50575), AWG 23/1, 500 m drum, SX, orange

Adequado para a construção de cablagem estruturada na área secundária e terciária.

Melhor desempenho e melhor qualidade de ligação com a rede.

- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco

- Blindagem dos pares individuais: folha em poliéster oculta em alumínio, cobre 100%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 500 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	27.00	55.00	55.00	35.00	105,875.00
Packaging Unit Inside	1	27.00	55.00	55.00	35.00	105,875.00
Packaging Unit Single	1	27.00	55.00	55.00	35.00	105,875.00
Net single without Packaging	1	27.00	54.00	54.00	34.00	0.00

More images:



CAT 7 S/FTP
Installation Cable, 500 m,
Simplex, D_{ca}

- AWG 23/1
- 1200 MHz
- 10 Gbit Ethernet
- CAT 7 1 pair only
- LSZH
- D_{ca} CPR class

DK-1743-VH-S // CAT 7 S/FTP Installation Cable, 500m, Simplex, D_{ca}

Anwendungsbeispiel
Example of use

DK-1743-VH-S // CAT 7 S/FTP Installation Cable, 500m, Simplex, D_{ca}

Kabelquerschnitt
Cable cross section

Produktdaten Product Information	Physikalische Spezifikation Physical Properties
Bestandteile: 1000m CAT 7 S/FTP Installation Cable, 500m Simplex, D _{ca}	Material: Polyethylene (PE) for jacket, Polypropylene (PP) for shield, Copper (Cu) for conductors
Technische Eigenschaften: 1200 MHz, 10 Gbit Ethernet, CAT 7 1 pair only, LSZH, D _{ca} CPR class	Mechanical Properties: Jacket thickness: 0.75mm, Shield thickness: 0.15mm, Conductor diameter: 0.12mm
Umweltbedingungen: Operating temperature: -20°C to 70°C, Storage temperature: -40°C to 100°C	Electrical Properties: Impedance: 100Ω, Attenuation: 0.5dB/100m, Crosstalk: <math>C_{12} < -40dB </math>

Linkageigenschaften Transmission Properties

Frequency	Attenuation	Shielding	Crosstalk	Impedance	Return Loss	Reflection Coefficient
100 MHz	0.2 dB	20 dB	0.1 dB	100 Ω	15 dB	0.1
1000 MHz	0.5 dB	25 dB	0.1 dB	100 Ω	15 dB	0.1
10000 MHz	1.0 dB	30 dB	0.1 dB	100 Ω	15 dB	0.1

Certificate
No. 19/16-13-1-E

Category 7

Zertifikat
Nr. 19/16-13-1-E

Kategorie 7

Certificate
No. 19/16-13-1

Class 5

Zertifikat
Nr. 19/16-13-1

Klasse 5

Linkageigenschaften Transmission Properties

Category	Shielding	Linkageigenschaften (dB)	Return Loss	Reflection Coefficient	Impedance
B2ca	Shielded	1+	15 dB	0.1	100 Ω
Cca	Shielded	3	15 dB	0.1	100 Ω
Dca	Shielded	3	15 dB	0.1	100 Ω
Eca	Shielded	3	15 dB	0.1	100 Ω

