


DIGITUS Cat.7 S/FTP installation cable, 500 m, simplex, Dca-s1a d1 a1

DK-1743-VH-5
EAN 4016032353997

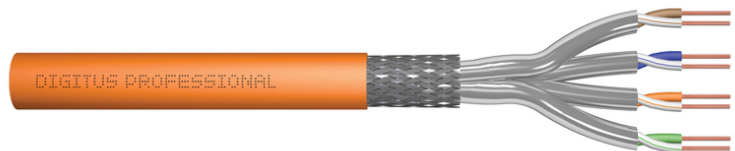

CAT 7 S-FTP installation cable, 1200 MHz Dca (EN 50575), AWG 23/1, 500 m drum, SX, orange

Adequado para a construção de cablagem estruturada na área secundária e terciária.

Melhor desempenho e melhor qualidade de ligação com a rede.

- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco

- Blindagem dos pares individuais: folha em poliéster oculta em alumínio, cobre 100%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 500 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair



Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	27.00	55.00	55.00	35.00	105,875.00
Packaging Unit Inside	1	27.00	55.00	55.00	35.00	105,875.00
Packaging Unit Single	1	27.00	55.00	55.00	35.00	105,875.00
Net single without Packaging	1	27.00	54.00	54.00	34.00	0.00

More images:



CAT 7 S/FTP Installation Cable, 500 m, Simplex, D_{ca}

AWG 23/1, 1200 MHz, 10 Gbit Ethernet, 1000 mbit/s, LSZH, D_{ca} CPRI class

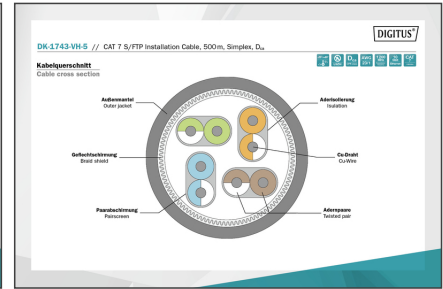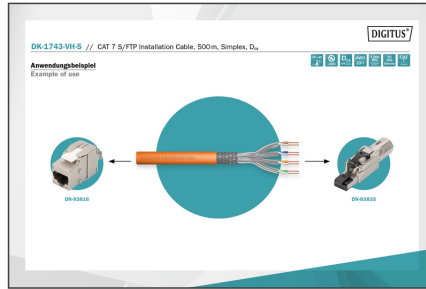

Produktdaten Product Information

Physikalische Spezifikation Physical Properties

Elektrische Eigenschaften Electrical Properties

Mechanische Eigenschaften Mechanical Properties

Leitungsverhalten Transmission Properties

FFREQ	ATT	MEXT	PL EXT	ACC	PL ACC	RL	RL EXT	PL RL EXT
1	1	1	1	1	1	1	1	1
10	1.3	1.1	1.1	1.1	1.1	1.1	1.1	1.1
100	1.8	1.4	1.4	1.4	1.4	1.4	1.4	1.4
1000	2.4	1.9	1.9	1.9	1.9	1.9	1.9	1.9
10000	3.5	2.8	2.8	2.8	2.8	2.8	2.8	2.8
100000	5.0	3.8	3.8	3.8	3.8	3.8	3.8	3.8
1000000	7.5	5.5	5.5	5.5	5.5	5.5	5.5	5.5
10000000	12.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0

Certificate No. 1743-VH-5


Zertifikat Nr. 1743-VH-5

GHMT Type Approval

Certificate No. 1743-VH-5

Zertifikat Nr. 1743-VH-5

GHMT Type Approval

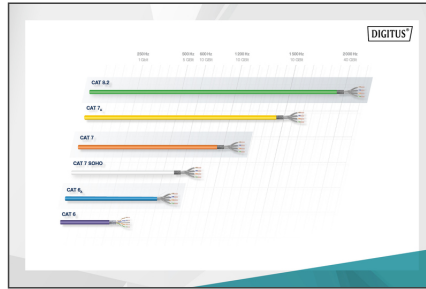

DIGITUS

Cat. 7, Class 7

Category 7



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.
ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com