

DIGITUS Face plate for Multimedia / Keystone Modules

DN-93831
EAN 4016032362418



Wallplate for Keystone Jacks, German Type 80x80 frame, 50x50 central plate, design comp.


The DIGITUS® Faceplate is suitable for the connection of the shielded DIGITUS® Keystone Modules. Included dust protection shutters provide perfect protection. The connection way of the module is 45° vertical. The face plate is fully designed and compatible with common switch programs.

- Layout keystone entry: 45° outlet
- Area of application: Cavity socket, trunking, surface mount box
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- Suitable for installation in trunking, flush and surface mount
- Central ground connection

- Integrated dust cover
- Plastic label field
- Design compatible to current switch ranges of switch manufacturers
- Technical properties:
- Wall outlet material: Die-cast metal
- Central plate material: ABS UL 94V-0
- Frame material: ABS UL 94V-0
- Surface mount box material: ABS UL 94V-0
- Physical properties:
- Operation temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Can be used as 1-Port and 2-Port wall outlet
- Colour: White RAL9003

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	120	7.52	39.00	28.00	31.00	33,852.00
Packaging Unit Inside	12	0.75	26.50	9.00	9.00	2,146.50
Packaging Unit Single	1	0.06	3.00	10.50	15.50	488.25
Net single without Packaging	1	0.07	2.70	8.00	8.00	0.00

More images:

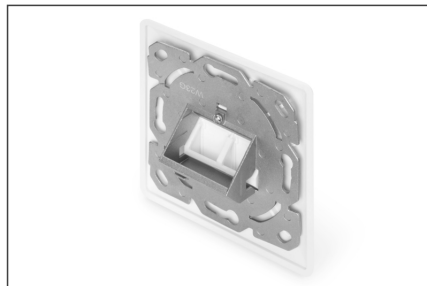

**Safety notes**

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com