

DIGITUS Cabo de instalação par entrançado DIGITUS CAT 5e U-UTP

DK-1511-V-1-1
EAN 4016032363804



CAT 5e U-UTP installation cable, 100 MHz Eca (PVC), AWG 24/1, 100 m paper box, sx, grey

Adequado para instalações de linhas de cabo classe D, 100MHz



- Isolamento: PE
- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco
- Revestimento geral: nenhum
- Revestimento exterior: PVC
- Cor: Cinzento (RAL 7035)

Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 5e
- Shielding: U-UTP, unshielded
- CPR: Eca
- Length: 100 m
- Color: grey
- Jacket: PVC
- Structure: 4 x 2 AWG 24/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	2.60	12.00	23.00	24.00	6,624.00
Packaging Unit Inside	1	2.60	12.00	23.00	24.00	6,624.00
Packaging Unit Single	1	2.60	12.00	23.00	24.00	6,624.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

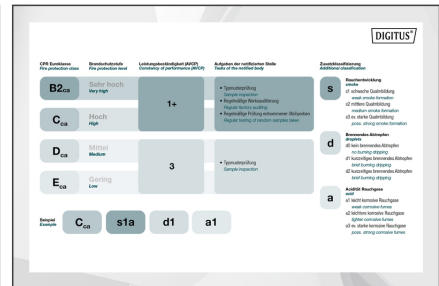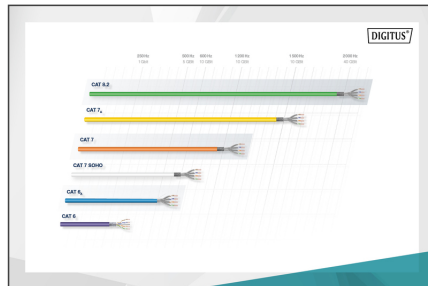



Intertek
ETL Verified Certificate of Conformance Number: 15112810RT-0014
This document certifies that the manufacturer, Assmann Electronic GmbH, has demonstrated compliance with the requirements of the applicable standard.

Linkageigenschaften Transmission Properties

FRF02	ATT	MEAT	FR-NEUT	ACE	FR-ACK	RL	BLR21	FR-NEUT2
dB	dB	dB	dB	dB	dB	dB	dB	dB
1	7	10	30	30	10	10	10	10
10	8	12	40	40	10	10	10	10
20	10	15	50	50	10	10	10	10
30	12	18	60	60	10	10	10	10
40	14	20	70	70	10	10	10	10
50	16	22	80	80	10	10	10	10
60	18	24	90	90	10	10	10	10
70	20	26	100	100	10	10	10	10
80	22	28	110	110	10	10	10	10
90	24	30	120	120	10	10	10	10
100	26	32	130	130	10	10	10	10

Digitus Produktinformation

Technische Spezifikationen Physical Properties	Mechanische Eigenschaften Mechanical Properties
Abmessungen Länge: 100m Bauweise: 5-polig Kategorie: CAT 5e	Spannung Spannung: 250V Temperaturbereich: -20°C bis +70°C
Leistung Leistung: 100mW	Steuerung Steuerung: Automatisch
Umweltbedingungen Temperaturbereich: -20°C bis +70°C Feuchtigkeit: 10% bis 90% Schwingung: 10m/s²	Materialien Materialien: PVC, PE, PA, ABS

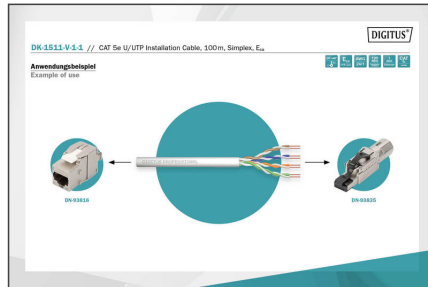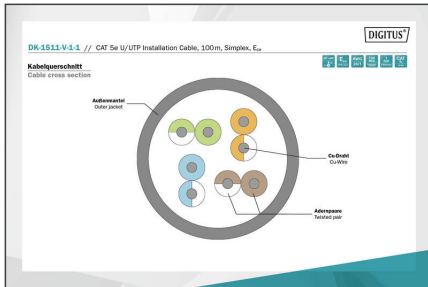

CAT 5e U/UTP Installation Cable, 100m, Simplex, E_{ca}

- 100 MHz
- 1 Gbit Ethernet
- AWG 24/1
- CAT 5e
- 20' / 150'
- E_{ca} CPRI Class



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com