

DIGITUS Cabo de instalação par entrançado DIGITUS CAT 5e U-UTP

DK-1511-V-1-1
EAN 4016032363804



CAT 5e U-UTP installation cable, 100 MHz Eca (PVC), AWG 24/1, 100 m paper box, sx, grey




Adequado para instalações de linhas de cabo classe D, 100MHz


- Isolamento: PE
- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco
- Revestimento geral: nenhum
- Revestimento exterior: PVC

- Cor: Cinzento (RAL 7035)
- Assortment: Twisted Pair Installation Cables
- Category: CAT 5e
- Shielding: U-UTP, unshielded
- CPR: Eca
- Length: 100 m
- Color: grey
- Jacket: PVC
- Structure: 4 x 2 AWG 24/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	2.60	12.00	23.00	24.00	6,624.00
Packaging Unit Inside	1	2.60	12.00	23.00	24.00	6,624.00
Packaging Unit Single	1	2.60	12.00	23.00	24.00	6,624.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00


More images:

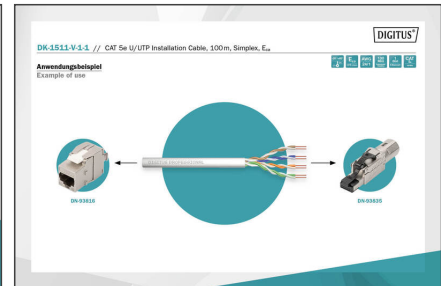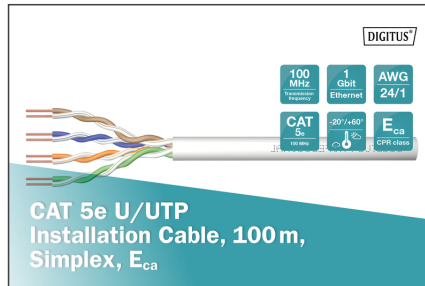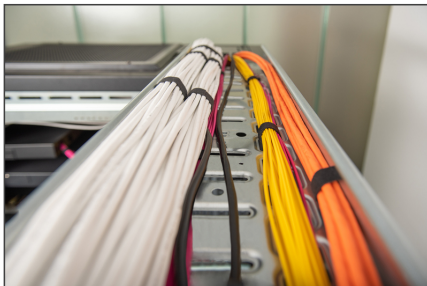

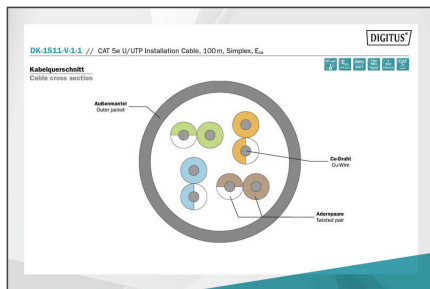

Produktdaten Produkt Information		Physikalische Eigenschaften Physical Properties	
Produktname Prod. Code	Final Cable, Shield-Free, UTP, 100m, Simplex, E _a	Teilenummer Part Number	60618460, 60618461, 60618462, 60618463, 60618464
Produkttyp Prod. Code	Final Cable, Shield-Free, UTP, 100m, Simplex, E _a	Hersteller Manufacturer	ASSMANN Electronic GmbH
Produkttyp Prod. Code	Final Cable, Shield-Free, UTP, 100m, Simplex, E _a	Hersteller Manufacturer	ASSMANN Electronic GmbH
Produkttyp Prod. Code	Final Cable, Shield-Free, UTP, 100m, Simplex, E _a	Hersteller Manufacturer	ASSMANN Electronic GmbH

Leistungsparameter-Tabelle Power Properties									
FRQ	ATT	NEXT	FLNEXT	ACR	PLACR	SL	ELEXT	PLNEXT	PLNEXT
1	1	25.2	19.2	6.0	25.2	17	6.0	25.2	25.2
10	0.3	47.2	43.2	4.0	47.2	20	4.0	47.2	47.2
100	0.1	58.2	54.2	4.0	58.2	20	4.0	58.2	58.2
1000	0.1	68.2	64.2	4.0	68.2	20	4.0	68.2	68.2

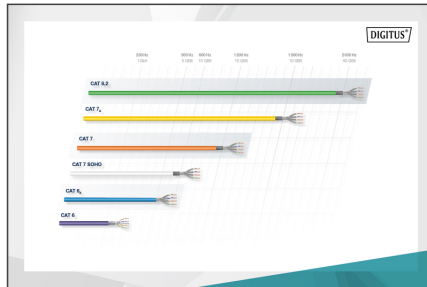

EN Standard	Standardabweichung Deviation from EN	Leistungsparameter (dB/100m) Power Properties (dB/100m)	Abgleich der Leistungsparameter Adjustment of Power Properties	Zusätzliche Informationen Additional Information
B2ca	Stärke hoch High	1+	• Symmetrisch • Gegenläufige Abschirmung • Hohe mechanische Flexibilität • Hohe Flexibilität für verschiedene Anwendungen	• Hohe Flexibilität • Hohe Flexibilität • Hohe Flexibilität
Dca	Mittel Medium	3	• Symmetrisch • Gegenläufige Abschirmung	• Hohe Flexibilität • Hohe Flexibilität • Hohe Flexibilität
Eca	Gering Low			• Hohe Flexibilität • Hohe Flexibilität • Hohe Flexibilität



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com