


DIGITUS Cat.7A S/FTP installation cable, 1000 m, simplex, Dca-s1a d1 a1

DK-1743-A-VH-10
EAN 4016032363859

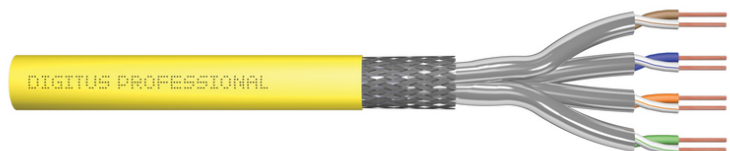

CAT 7A S-FTP installation cable, 1500 MHz Dca (EN 50575), AWG 22/1, 1000 m drum, sx, yellow

The Digitus Cat 7 installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-4-1, DIN EN 50173, IEC 61156-7, EN 50288-9-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.





Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 22/1
- System/s of AVCP: AVCP 3
- Insulation: SFS-PE (Foam-Skin Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shielding: Aluminum foil, providing 100 % coverage
- Overall shielding: Copper tinned braid
- Outer sheath: Dca-s1a d1 a1 acc. EN 50575; LSZH
- Outer sheath diameter (nominal): 0,60 mm (Dca); 0,60 mm (Cca)
- Outer sheath color: Yellow (RAL 1028)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60°C

- Operating temperature range: -20 °C up to +60 °C
- Temperature installation range: 0°C to +50°C
- Overall diameter Simplex (nominal): 7,8 mm (Dca); 7,8 mm (Cca)
- Weight (kg/km): 65 kg (Dca); 65 kg (Cca)
- Electrical properties:
- Impedance: 100±5 Ohm @ 1-1000 MHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 147 Ohm/Km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 10 nS/100 m max.
- Separating class: "d" acc. to EN 50174-2
- NVP: 79%
- Flame spread: EN 60332-1-2 (LSOH-PVC)
- Halogen-free, corrosiveness: EN 60754-1/2 (LSOH)
- Smoke density EN 61034-2
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 1000 m
- Color: yellow
- Jacket: LSOH
- Structure: 4 x 2 AWG 22/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	68.00	53.00	53.00	43.50	122,192.00
Packaging Unit Inside	1	68.00	53.00	53.00	43.50	122,192.00
Packaging Unit Single	1	68.00	53.00	53.00	43.50	122,192.00
Net single without Packaging	1	68.00	0.00	0.00	0.00	0.00

More images:

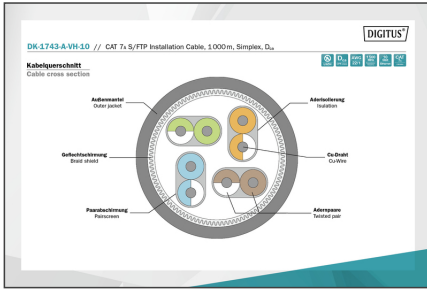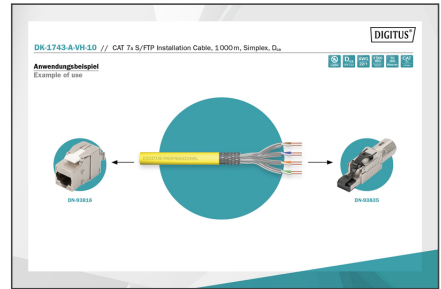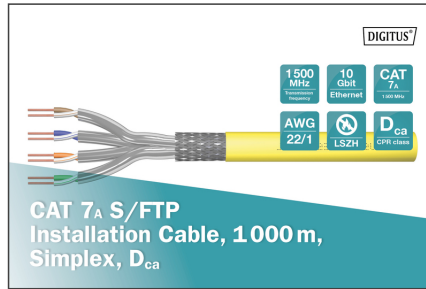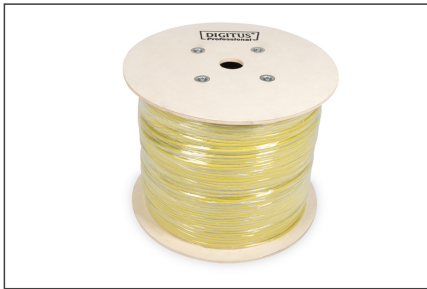

Product information table with columns: Produktbeschreibung (Product Description), Technische Eigenschaften (Technical Properties), and Mechanische Eigenschaften (Mechanical Properties).

Performance table with columns: Leistungseigenschaften (Performance Characteristics) and various test parameters.


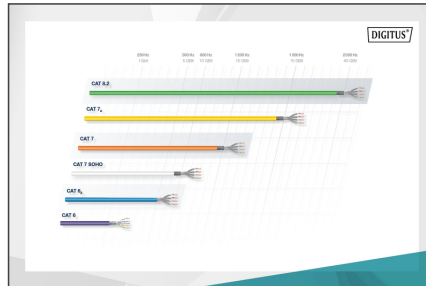


Table detailing GPR System, System Characteristics, and System Characteristics (GPR) for different cable classes.

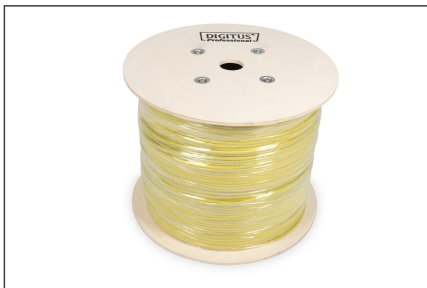

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
Installation only by trained specialists.
Installation only in dry rooms.
The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com