


# DIGITUS Соединительный кабель USB, Type-C

AK-300136-010-S  
EAN 4016032368731

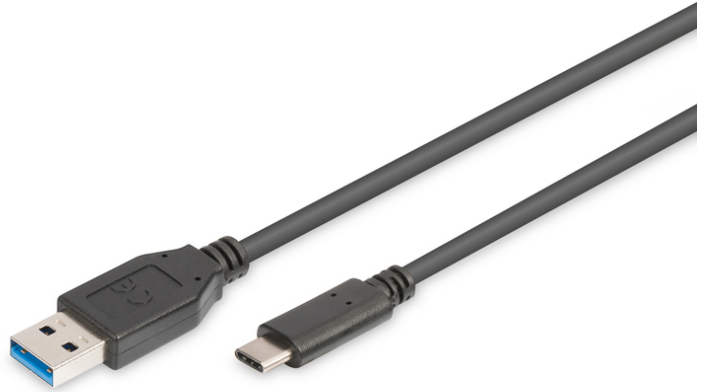

**USB Type-C connection cable, type C to A M/M, 1.0m, 3A, 5GB, 3.0 Version, bl**

Для подсоединения внешних концевых устройств USB (с гнездом типа C, например, планшета или смартфона) к USB-хосту (например, ПК, ноутбуку или USB-хабу). Скорость передачи данных до 5 Гбит/с (Super-Speed).

**Для высокоскоростной синхронизации и зарядки**

- Высокоскоростная передача данных до 5 Гбит/с - в 10 раз быстрее, чем USB 2.0
- Поддерживает электропитание до 3 А
- Поддерживает спецификацию USB PD (подача мощности).
- Обратная совместимость с USB 2.0 и 1.1
- Штекер Type-C, используется двусторонне

- Assortment: USB Cables
- AWG: 24/28
- Color cable: black
- Color connector: black
- Connector 1: USB C, plug
- Connector 2: USB A, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- Hoods: molded
- Packaging: Polybag
- USB compliance: USB 3.0 / 3.1
- Wire material: CU
- Length: 1 m
- Shielding: Double shielding
- USB-C Products: yes

**Attributes**

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	150	10.90	50.00	32.00	21.00	33,600.00
Packaging Unit Inside	10	0.73	30.00	20.00	3.70	2,220.00
Packaging Unit Single	1	0.07	9.00	9.00	1.50	121.50
Net single without Packaging	1	0.05	9.00	9.00	1.50	0.00

**More images:**





**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)