


DIGITUS HP-compatible mini GBIC (SFP) Module, 1.25 Gbps, 20km

DN-81001-01
EAN 4016032369967

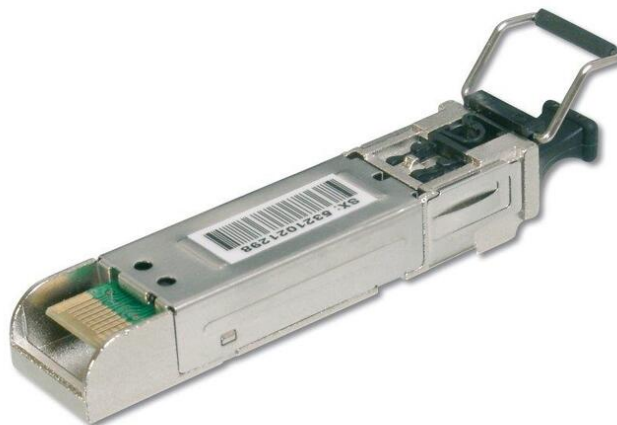

1.25 Gbps SFP Module, Singlemode, HP-compatible LC Duplex Connector, 1310nm, up to 20km, HP Aruba

O módulo transceptor DIGITUS® Mini GBIC (SFP) proporciona alta qualidade e fiabilidade. Quer seja a partir de interruptor para interruptor, conversor para interruptor, conversor para conversor ou qualquer outra aplicação: a vasta gama de módulos DIGITUS® permite a utilização flexível da tecnologia de fibra ótica. A conformidade com a norma MSA (Multi Source Agreement) garante a compatibilidade com fabricantes terceiros.

A ligação de fibra ótica Plug and Play

- Compatível com HP
- Compatível com HP-Aruba
- Módulo Mini GBIC SFP (Small Form Factor Pluggable)
- Alta qualidade e excelente proteção contra falhas
- Velocidade de dados máxima de 1,25 Gbps
- Está em conformidade com a norma IEEE 802.3z Gigabit
- Produto laser de classe 1 em conformidade com a EN 60825-1
- Instalação Plug and Play simples
- Compatível com a norma MSA (Multi Source Agreement)
- Hot pluggable

- Ligação: 1x LC Duplex
- Comprimento de onda: 1310 nm
- Potência de transmissão: Mínima -8 dBm, máxima -3 dBm
- Sensibilidade de receção: mínima -24 dBm
- Para uma distância até 20 km
- Adequado para cabo de fibra ótica 09/125 µm, modo simples
- Mecanismo de bloqueio seguro e rápido
- Fonte de alimentação 3,3 V
- Temperatura de funcionamento: 0°C-70°C

Attributes

- Mode: Singlemode
- Connector: LC
- Distance (km): 20
- Wavelength: 1310 nm
- DDM Support: no
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: HP, Universal (MSA)
- Ethernet speed: Gigabit

Package contents

- Módulo SFP

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	100	5.80	54.50	37.50	21.00	42,918.80
Packaging Unit Inside	1	0.06	11.50	9.50	3.00	327.75
Packaging Unit Single	1	0.06	11.50	9.50	3.00	327.75
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials

- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com