


# DIGITUS Cat.7 S/FTP installation cable, 500 m, duplex, Dca-s1a d1 a1

DK-1743-VH-D-5  
EAN 4016032380573

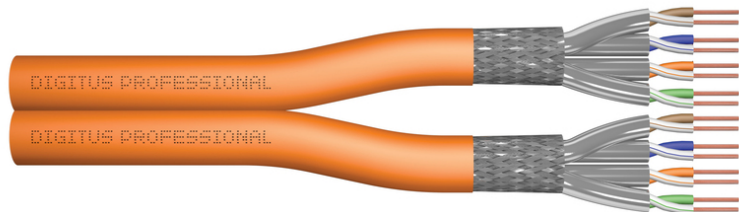

### CAT 7 S-FTP installation cable, 1200 MHz Dca (EN 50575), AWG 23/1, 500m drum, Dx, orange

The Digitus Cat 7 installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-4-1, DIN EN 50173, IEC 61156-7, EN 50288-9-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+. The shielding structure is composed of single shielded pairs with a tinned copper braid, which ensures excellent shielding and electrical values.

#### Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 23/1
- System(s) of assessment and verification of constancy of performance: System 3
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: aluminum-laminated polyester film, covers 100%
- Overall shielding: copper braiding
- Outer sheath: Dca-s2 d1 a1 acc. to EN 50575; LSZH
- Color: Orange (RAL 2008)
- Mechanical properties:
- Strain relief: 135N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C
- Operating temperature range: -20 °C to +50 °C




- Installation temperature range: 0 °C to +50 °C
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 1000 MHz; 100±25 OHM @ 100-600 MHz
- Capacitance: 45pF/m nom. at 1KHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 95 Ohm/km max. (2% max. unbalanced resistance)
- Loop resistance: 190 Ohm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Phase delay: 450 nS/100 m max.
- Time delay: 10 nS/100 m max.
- Separation class: "d" according to EN 50174-2
- NVP: 79%
- Flame spread: EN 60332-1-2 (LSOH-PVC)
- Halogen-free, corrosivity: EN 60754-1/2 (LSOH)
- Smoke density EN 61034-2

#### Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 500 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair


Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	57.00	55.00	55.00	35.00	105,875.00
Packaging Unit Inside	1	57.00	55.00	55.00	35.00	105,875.00
Packaging Unit Single	1	57.00	55.00	55.00	35.00	105,875.00
Net single without Packaging	1	57.00	0.00	0.00	0.00	0.00

More images:

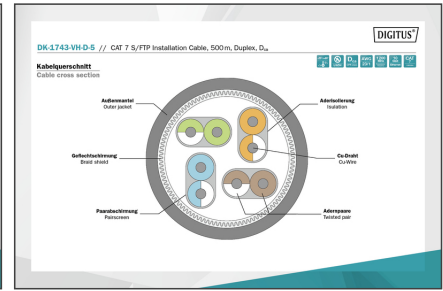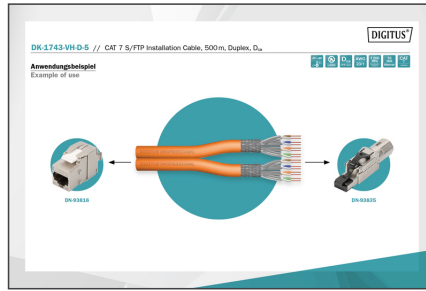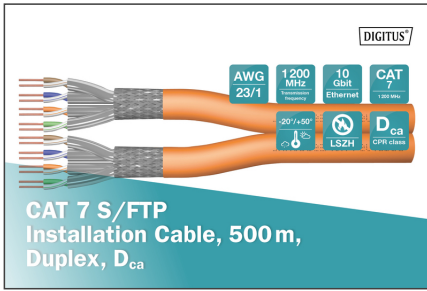

Produktinformationen Product Information		Physikalische Spezifikationen Physical Properties	
<b>Hersteller</b> Manufacturer: ASSMANN Electronic GmbH	<b>Produktname</b> Product Name: CAT 7 S/FTP Installation Cable, 500m, Duplex, Dca	<b>Typ</b> Type: CAT 7 S/FTP	<b>Norm</b> Standard: EN 50173-1, EN 50173-2, EN 50173-3, EN 50173-4, EN 50173-5, EN 50173-6, EN 50173-7, EN 50173-8, EN 50173-9, EN 50173-10, EN 50173-11, EN 50173-12, EN 50173-13, EN 50173-14, EN 50173-15, EN 50173-16, EN 50173-17, EN 50173-18, EN 50173-19, EN 50173-20, EN 50173-21, EN 50173-22, EN 50173-23, EN 50173-24, EN 50173-25, EN 50173-26, EN 50173-27, EN 50173-28, EN 50173-29, EN 50173-30, EN 50173-31, EN 50173-32, EN 50173-33, EN 50173-34, EN 50173-35, EN 50173-36, EN 50173-37, EN 50173-38, EN 50173-39, EN 50173-40, EN 50173-41, EN 50173-42, EN 50173-43, EN 50173-44, EN 50173-45, EN 50173-46, EN 50173-47, EN 50173-48, EN 50173-49, EN 50173-50, EN 50173-51, EN 50173-52, EN 50173-53, EN 50173-54, EN 50173-55, EN 50173-56, EN 50173-57, EN 50173-58, EN 50173-59, EN 50173-60, EN 50173-61, EN 50173-62, EN 50173-63, EN 50173-64, EN 50173-65, EN 50173-66, EN 50173-67, EN 50173-68, EN 50173-69, EN 50173-70, EN 50173-71, EN 50173-72, EN 50173-73, EN 50173-74, EN 50173-75, EN 50173-76, EN 50173-77, EN 50173-78, EN 50173-79, EN 50173-80, EN 50173-81, EN 50173-82, EN 50173-83, EN 50173-84, EN 50173-85, EN 50173-86, EN 50173-87, EN 50173-88, EN 50173-89, EN 50173-90, EN 50173-91, EN 50173-92, EN 50173-93, EN 50173-94, EN 50173-95, EN 50173-96, EN 50173-97, EN 50173-98, EN 50173-99, EN 50173-100
<b>Elektrische Eigenschaften Electrical Properties</b>	<b>Mechanische Eigenschaften Mechanical Properties</b>		

Leistungsparameter Performance Properties											
PROZ.	NETZ	NETZ	PL NETZ	ACER	PL ACER	PL	ELNETZ	PL ELNETZ	PL	ELNETZ	PL ELNETZ
1.1	2.2	3.3	4.4	5.5	6.6	7.7	8.8	9.9	10.0	11.1	12.2
13	14	15	16	17	18	19	20	21	22	23	24
25	26	27	28	29	30	31	32	33	34	35	36
37	38	39	40	41	42	43	44	45	46	47	48
49	50	51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70	71	72
73	74	75	76	77	78	79	80	81	82	83	84
85	86	87	88	89	90	91	92	93	94	95	96
97	98	99	100								

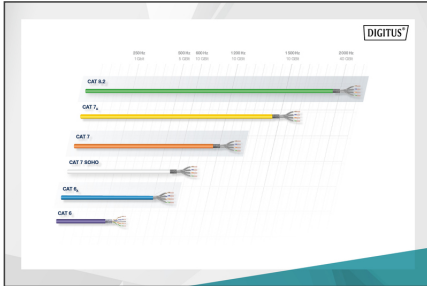

GHMT	Standard	Category	Performance
B2	Class B	Very High	1+
C	Class C	High	3
D	Class D	Medium	3
E	Class E	Low	3



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.  
 ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)