


DIGITUS Cat.7 S/FTP installation cable, 500 m, duplex, Dca-s1a d1 a1

DK-1743-VH-D-5
EAN 4016032380573

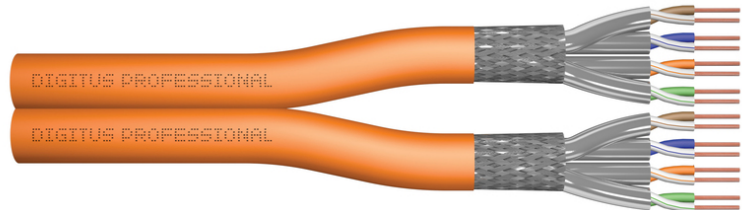

CAT 7 S-FTP installation cable, 1200 MHz Dca (EN 50575), AWG 23/1, 500 m drum, DX, orange

Adequado para a construção de cablagem estruturada na área secundária e terciária.

Melhor desempenho e melhor qualidade de ligação com a rede.




- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco
- Blindagem dos pares individuais: folha em poliéster oculta em alumínio, cobre 100%

Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 500 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	57.00	55.00	55.00	35.00	105,875.00
Packaging Unit Inside	1	57.00	55.00	55.00	35.00	105,875.00
Packaging Unit Single	1	57.00	55.00	55.00	35.00	105,875.00
Net single without Packaging	1	57.00	0.00	0.00	0.00	0.00

More images:

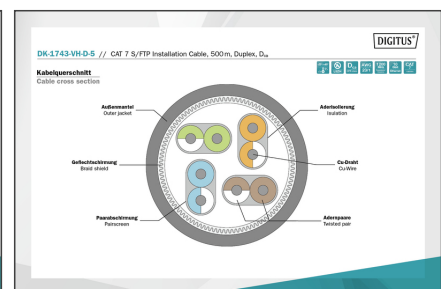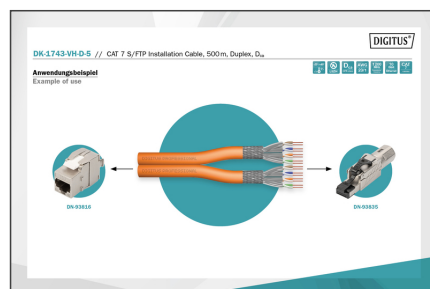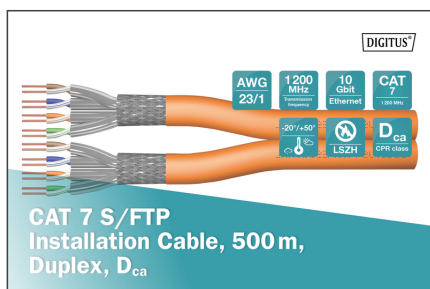


Produktbeschreibung / Product Information	Physikalische Spezifikationen / Physical Properties
Bestandteile / Components: - 28x2 (28x2) Shielded Twisted Pair (STP) - 28x4 (28x4) Shielded Twisted Pair (STP) - 28x8 (28x8) Shielded Twisted Pair (STP) - 28x16 (28x16) Shielded Twisted Pair (STP)	Line: - 28x2 (28x2) Shielded Twisted Pair (STP) - 28x4 (28x4) Shielded Twisted Pair (STP) - 28x8 (28x8) Shielded Twisted Pair (STP) - 28x16 (28x16) Shielded Twisted Pair (STP)
Technische Eigenschaften / Technical Properties: - Shielded Twisted Pair (STP) - Shielded Twisted Pair (STP) - Shielded Twisted Pair (STP) - Shielded Twisted Pair (STP)	Mechanische Eigenschaften / Mechanical Properties: - Shielded Twisted Pair (STP) - Shielded Twisted Pair (STP) - Shielded Twisted Pair (STP) - Shielded Twisted Pair (STP)

Leistungsmerkmale / Performance Characteristics											
100G	40G	25G	10G	10G	10G	10G	10G	10G	10G	10G	10G
1	1	1	1	1	1	1	1	1	1	1	1
100	100	100	100	100	100	100	100	100	100	100	100
100	100	100	100	100	100	100	100	100	100	100	100

Certificate
No. 151219-19-1
Category 7

Zertifikat
No. 151219-19-1
Kategorie 7

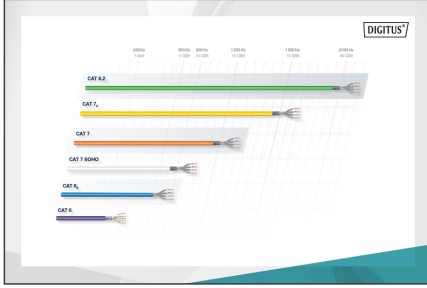

Category	Shielding	Structure	Frequency	Length
B2 Cat	None	Twisted Pair	1+	100m
C Cat	None	Twisted Pair	3	100m
D Cat	None	Twisted Pair	3	100m
E Cat	None	Twisted Pair	3	100m



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com