


# DIGITUS Cabo de interconexões CAT 6 S-FTP

DB-160144-020-S  
EAN 4016032384045

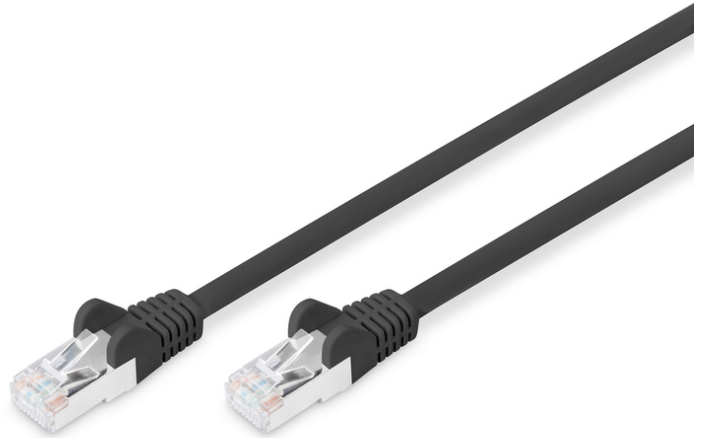

**Patch Cord, CAT6, RJ45 M/M, 2.0m, S-FTP, AWG 27/7, LSZH, bl**

Este cabo de rede é, por exemplo, adequado para interconexões em armários de rede. Outro campo de aplicação é a ligação para o sistema DLS.



**Melhor desempenho e melhor qualidade de ligação com a rede.**



- Revestimento LSZH – baixa emissão de fumo, sem halogéneo
- Assortment: Twisted Pair Patch Cables
- Color cable: black
- Color connector: black

- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Hoods: plastic
- Wire material: CU
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 2 m
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 40           | 6.80        | 54.00      | 26.00      | 36.00       | 50,544.00       |
| Packaging Unit Inside        | 10           | 1.70        | 50.00      | 25.00      | 9.00        | 11,250.00       |
| Packaging Unit Single        | 1            | 0.17        | 5.00       | 7.50       | 23.50       | 881.25          |
| Net single without Packaging | 1            | 0.06        | 3.00       | 6.00       | 20.00       | 0.00            |

**More images:**

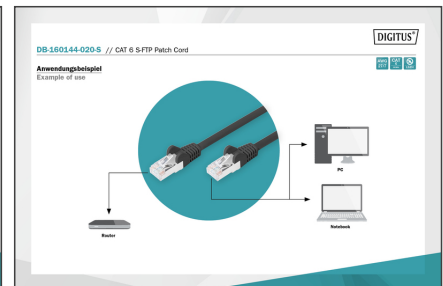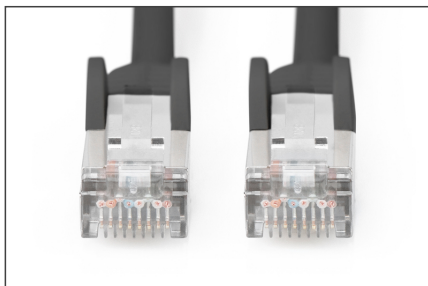

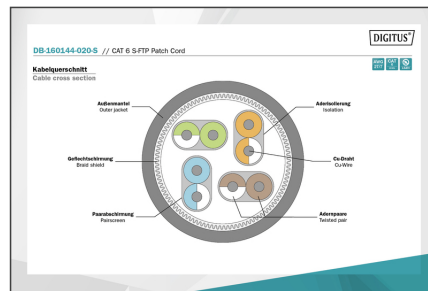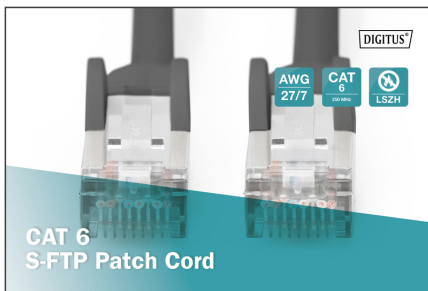

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)