


# DIGITUS Cabo de ligação HDMI High Speed, tipo A, alta flexibilidade

DB-330120-020-S  
EAN 4016032391319

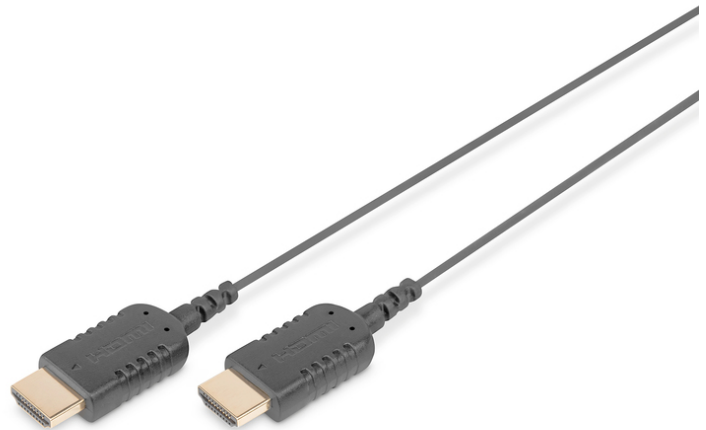

**HDMI High Speed connection cable, type A, HighFlex M/M, 2.0m, 4K Ultra HD@30Hz, active, CE, gold, bl**

Este cabo HD compatível com 3D serve para a ligação de equipamentos áudio/vídeo, como, por exemplo, leitores Blu-ray, consolas de jogo, entre outros, a um televisor, monitor ou computador.




**Alta flexibilidade, embalagem extremamente pequena, ideal para viagens**

- Suporta 4K/2K com 30Hz
- Suporta 3D
- Suporta Canal de Retorno Áudio (ARC)
- Suporta Controlo Eletrónico do Consumidor (CEC)

- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Wire material: CU
- Length: 2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

| Logistics                    |              |             |            |            |             |           |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³       |
| Packaging Unit Carton        | 100          | 4.70        | 50.00      | 35.00      | 39.50       | 69,125.00 |
| Packaging Unit Inside        | 1            | 0.05        | 9.50       | 7.50       | 3.60        | 256.50    |
| Packaging Unit Single        | 1            | 0.05        | 9.50       | 7.50       | 3.60        | 256.50    |
| Net single without Packaging | 1            | 0.03        | 2.00       | 1.00       | 1.00        | 0.00      |

**More images:**

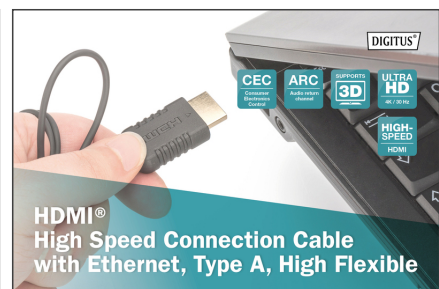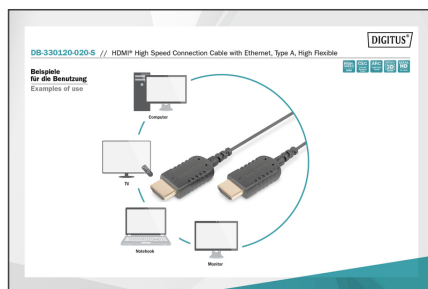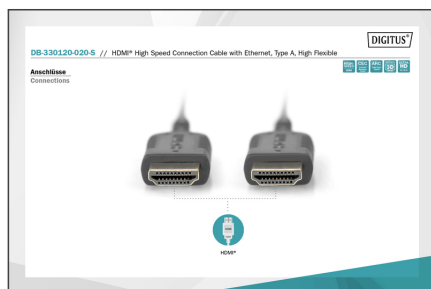

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)