

DIGITUS HP-совместимый модуль mini GBIC (SFP), 1,25 Гбит/с, 20 км, с функцией DDM

DN-81003-01
EAN 4016032391562



1.25 Gbps SFP Module, Singlemode, BiDi, HP-comp. LC Simplex, Tx1310nm/Rx1550nm, up to 20km, HP

Модули трансиверов DIGITUS® Mini GBIC (SFP) обеспечивают наивысшее качество и надежность. Будь то соединение между коммутаторами, между конвертером и коммутатором, между конвертерами или другие, обширные возможности применения: Большое разнообразие модулей DIGITUS® позволяет гибко использовать технологию стекловолокна. Благодаря соответствию стандарту MSA (Multi Source Agreement) обеспечивается совместимость с сторонними производителями.

Стекловолоконное соединение Plug and Play

- HP-совместимый
- Совместим с HP-Aruba
- Модуль Mini GBIC SFP (компактный приёмопередатчик)
- Поддерживает DDM (Digital Diagnostic Monitoring)
- Двухнаправленный модуль WDM — требуется только одно волокно
- Высокое качество и максимальная отказоустойчивость
- Максимальная скорость передачи данных 1,25 Гбит/с
- Соответствует гигабитному стандарту IEEE 802.3z
- Класс 1 лазерный продукт по EN 60825-1
- Простая установка Plug and Play


- Совместим со стандартом MSA (сетевое соглашение)
- С возможностью оперативной замены
- Тип подключения: 1 симплекс LC
- Длина волны: Tx 1310 нм / Rx 1550 нм
- Мощность передатчика: Минимум — 5 дБм, максимум — 0 дБм
- Чувствительность приемника: Минимум — 24 дБм
- Для дистанции до 20 км
- Подходит для одномодового стекловолоконного кабеля 09/125µm
- Надежный быстродействующий механизм
- Электропитание 3,3 В
- Рабочая температура: 0-70 °C
- Mode: Singlemode
- Connector: LC
- Distance (km): 20
- Wavelength: 1310/1550 nm
- DDM Support: yes
- Broadcasting Mode: Bidirectional
- Manufacturer compatibility: HP
- Ethernet speed: Fast Ethernet

Package contents

- Модуль SFP

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	1	0.04	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	3.00	11.50	9.00	310.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

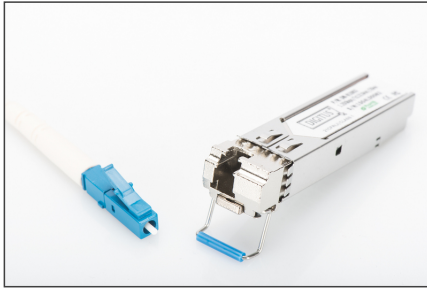

SFP Modules						
Part Number	SKU Code	Speed	Distance	Connector	Mounting	Operating Temperature
284P001	4010000000001	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P002	4010000000002	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P003	4010000000003	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P004	4010000000004	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P005	4010000000005	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P006	4010000000006	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P007	4010000000007	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P008	4010000000008	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P009	4010000000009	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P010	4010000000010	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P011	4010000000011	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P012	4010000000012	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P013	4010000000013	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P014	4010000000014	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P015	4010000000015	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P016	4010000000016	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P017	4010000000017	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P018	4010000000018	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P019	4010000000019	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P020	4010000000020	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P021	4010000000021	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P022	4010000000022	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P023	4010000000023	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P024	4010000000024	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P025	4010000000025	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P026	4010000000026	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P027	4010000000027	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P028	4010000000028	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P029	4010000000029	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P030	4010000000030	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P031	4010000000031	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P032	4010000000032	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P033	4010000000033	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P034	4010000000034	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P035	4010000000035	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P036	4010000000036	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P037	4010000000037	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P038	4010000000038	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P039	4010000000039	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P040	4010000000040	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P041	4010000000041	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P042	4010000000042	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P043	4010000000043	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P044	4010000000044	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P045	4010000000045	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P046	4010000000046	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P047	4010000000047	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P048	4010000000048	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P049	4010000000049	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C
284P050	4010000000050	10 Gbps	10 km	LC Duplex Plastic	19mm	-40 to 70 °C

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com