


DIGITUS Cat.7 S/FTP installation cable, 100 m, simplex, Dca-s1a d1 a1

DK-1743-VH-1
EAN 4016032392101

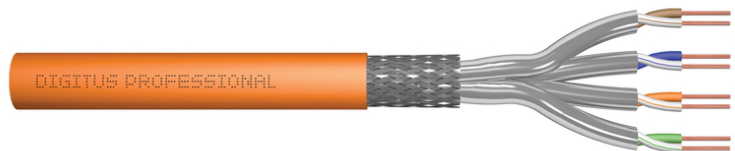

CAT 7 S-FTP installation cable, 1200 MHz Dca (EN 50575), AWG 23/1, 100 m ring, SX, orange

Adequado para a construção de cablagem estruturada na área secundária e terciária.

Melhor desempenho e melhor qualidade de ligação com a rede.

- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco
- Blindagem dos pares individuais: folha em poliéster oculta em alumínio, cobre 100%

Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 100 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	5.16	33.00	33.00	11.00	11,979.00
Packaging Unit Inside	1	5.16	33.00	33.00	11.00	11,979.00
Packaging Unit Single	1	5.16	33.00	33.00	11.00	11,979.00
Net single without Packaging	1	0.00	33.00	33.00	11.00	0.00

More images:





DIGITUS

AWG 23/1 | 1200 MHz | 10 Gbit Ethernet | CAT 7 | LSZH | Dca GPR class

CAT 7 S/FTP Installation Cable, 100 m, Simplex, D_{ca}

DIGITUS

DK-1743-VH-1 // CAT 7 S/FTP Installation Cable, 100m, Simplex, D_{ca}

Anwendungsbeispiel
Example of use

DIGITUS

DK-1743-VH-1 // CAT 7 S/FTP Installation Cable, 100m, Simplex, D_{ca}

Kabelquerschnitt
Cable cross-section

Labels: Außenmantel (Outer jacket), Abschirmung (Shielding), Cu-Dräht (Cu-Wire), Abschirmung (Shielding), Parachirmung (Parashield), Parachirmung (Parashield).

DIGITUS

Produktinformation Product Information		Physikalische Spezifikationen Physical Properties	
Produktname: CAT 7 S/FTP Installation Cable, 100m, Simplex, D _{ca}	Hersteller: ASSMANN Electronic GmbH	Material: PVC	Wahlstrom: 100 V AC
AWG: 23/1	1200 MHz	10 Gbit Ethernet	CAT 7
LSZH	Dca GPR class		

DIGITUS

Leitungsparameter-Transmissions Properties

FRQS	ZT	NEXT	PSNEXT	ACR	PSACR	PL	ELFEXT	PS ELFEXT
1	1	1	1	1	1	1	1	1
10	13	20	25	21	20	19	20	19
100	18.1	25.1	30.1	25.1	24.1	23.1	24.1	23.1
200	19	26.1	31.1	26.1	25.1	24.1	25.1	24.1
300	19.1	26.1	31.1	26.1	25.1	24.1	25.1	24.1
400	19.1	26.1	31.1	26.1	25.1	24.1	25.1	24.1
500	19.1	26.1	31.1	26.1	25.1	24.1	25.1	24.1
600	19.1	26.1	31.1	26.1	25.1	24.1	25.1	24.1
700	19.1	26.1	31.1	26.1	25.1	24.1	25.1	24.1
800	19.1	26.1	31.1	26.1	25.1	24.1	25.1	24.1
900	19.1	26.1	31.1	26.1	25.1	24.1	25.1	24.1
1000	19.1	26.1	31.1	26.1	25.1	24.1	25.1	24.1

GHMT

Certificate No. 154133-13-0

Category T

Zertifikat Nr. 154133-13

Kategorie T

GHMT Type Approval

GHMT

Certificate No. 154133-13

Class S

Zertifikat Nr. 154133-13

Class S

GHMT Type Approval

DIGITUS

DIGITUS

AWG	Shielding	Conductors	Shielding	Conductors
B2ca	Shield braid	1+	Shielding	S
Cca	Braid	3	Shielding	d
Dca	None	3	Shielding	a
Eca	Shielding	3	Shielding	a

Labels: Cca, sta, d1, a1



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com