


DIGITUS Cat.7 S/FTP installation cable, 100 m, simplex, Dca-s1a d1 a1

DK-1743-VH-1
EAN 4016032392101

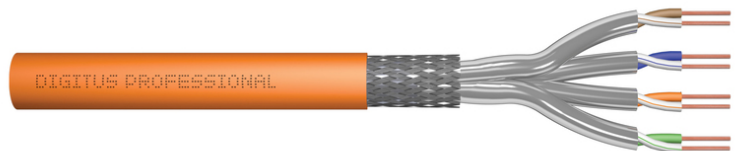

CAT 7 S-FTP installation cable, 1200 MHz Dca (EN 50575), AWG 23/1, 100 m ring, SX, orange

Adequado para a construção de cablagem estruturada na área secundária e terciária.

Melhor desempenho e melhor qualidade de ligação com a rede.

- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco

- Blindagem dos pares individuais: folha em poliéster oculta em alumínio, cobre 100%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 100 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	5.16	33.00	33.00	11.00	11,979.00
Packaging Unit Inside	1	5.16	33.00	33.00	11.00	11,979.00
Packaging Unit Single	1	5.16	33.00	33.00	11.00	11,979.00
Net single without Packaging	1	0.00	33.00	33.00	11.00	0.00

More images:





DIGITUS

AWG 23/1 | 1200 MHz | 10 Gbit Ethernet | CAT 7 | 50+/+50P | LSZH | Dca GPR class

CAT 7 S/FTP Installation Cable, 100 m, Simplex, D_{ca}

DIGITUS

DK-1743-VH-1 // CAT 7 S/FTP Installation Cable, 100m, Simplex, D_{ca}

Anwendungsbeispiel
Example of use

DIGITUS

DK-1743-VH-1 // CAT 7 S/FTP Installation Cable, 100m, Simplex, D_{ca}

Kabelquerschnitt
Cable cross-section

DIGITUS

Produktinformation Product Information		Physikalische Spezifikationen Physical Properties	
Produktname: CAT 7 S/FTP Installation Cable, 100m, Simplex, D _{ca}	Hersteller: ASSMANN Electronic GmbH	Material: PVC	Wahlstrom: 100 V AC
AWG: 23/1	1200 MHz	Leitungsart: 10 Gbit Ethernet	Leitungsart: CAT 7
50+/+50P	LSZH	Dca	GPR class

DIGITUS

Leitungsparameter-Transmissions Properties

FRQS	ZFT	NEXT	PSNEXT	ACR	PSACR	RL	ELFEXT	PS ELFEXT
1	1	1	1	1	1	1	1	1
10	13	26	31	31	31	31	26	26
100	101	224	184	143	143	143	101	101
200	31	84,3	63,1	34,1	34,1	34,1	31	31
300	63,1	119	88,1	50,1	50,1	50,1	63,1	63,1
400	84,3	149,1	111,1	61,1	61,1	61,1	84,3	84,3
500	101	179,1	133,1	72,1	72,1	72,1	101	101
600	119	209,1	155,1	83,1	83,1	83,1	119	119
700	133	239,1	177,1	94,1	94,1	94,1	133	133
800	149	269,1	199,1	105,1	105,1	105,1	149	149
900	163	299,1	221,1	116,1	116,1	116,1	163	163
1000	179	329,1	243,1	127,1	127,1	127,1	179	179

GHMT

Certificate No. 154133-13-E
Category T

Zertifikat Nr. 154133-13
Kategorie T

GHMT Type Approval

GHMT

Certificate No. 154133-13
Class S

Zertifikat Nr. 154133-13
Klasse S

GHMT Type Approval

DIGITUS

DIGITUS

AWG	Shielding	Conductivity of pure copper	Shielding	Conductivity of pure copper
B2ca	Shield braid	1+	Shielding	1+
Cca	Braid	3	Shielding	3
Dca	Mesh	3	Shielding	3
Eca	Coating	1	Shielding	1

AWG: Cca, sta, d1, a1



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com