


DIGITUS SFP+ 10 Gbps Bi-directional Module, Singlemode, TX1270/RX1330, 10km

DN-81204
EAN 4016032424260

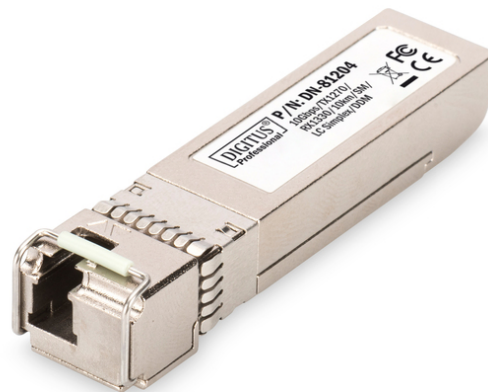

10G SFP+ Module, Singlemode, BiDi, DDM LC Simplex Connector, Tx1270/Rx1330, up to 10km

O módulo transceptor DIGITUS® Mini GBIC (SFP) proporciona alta qualidade e fiabilidade. Quer seja a partir de interruptor para interruptor, conversor para interruptor, conversor para conversor ou qualquer outra aplicação: a vasta gama de módulos DIGITUS® permite a utilização flexível da tecnologia de fibra ótica. A conformidade com a norma MSA (Multi Source Agreement) garante a compatibilidade com fabricantes terceiros.

A ligação de fibra ótica Plug and Play

- Compatível os seguintes fabricantes: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- Ligação: 1x LC Simplex
- Módulo bidirecional WDM - apenas é necessária uma fibra
- Mecanismo de bloqueio seguro e rápido
- Alta qualidade e excelente proteção contra falhas

- Produto laser de classe 1 em conformidade com a EN 60825-1
- Instalação Plug and Play simples
- Compatível com a norma MSA (Multi Source Agreement)
- Hot pluggable
- Fonte de alimentação 3,3 V
- Adequado para cabo de fibra ótica 09/125 µm, modo simples
- Temperatura de funcionamento: 0°C–70°C


Attributes

- Mode: Singlemode
- Connector: LC
- Distance (km): 10
- Wavelength: 1270/1330 nm
- DDM Support: yes
- Broadcasting Mode: Biidirectional
- Manufacturer compatibility: Universal (MSA), Cisco
- Ethernet speed: 10 Gigabit

Package contents

- 10G SFP+ Module

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 120 | 7.00 | 55.00 | 39.50 | 25.50 | 55,398.80 |
| Packaging Unit Inside | 1 | 0.06 | 11.70 | 9.30 | 3.20 | 348.19 |
| Packaging Unit Single | 1 | 0.06 | 11.70 | 9.30 | 3.20 | 348.19 |
| Net single without Packaging | 1 | 0.03 | 6.00 | 0.80 | 1.00 | 0.00 |

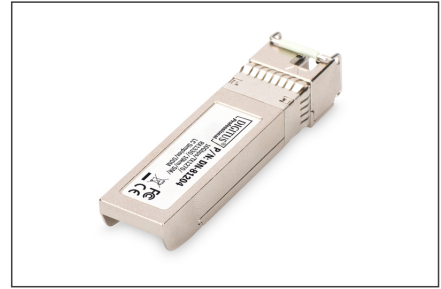More images:**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com