


DIGITUS DIGITUS CAT 6 SF/UTP монтажный кабель витая пара

DK-1633-P-1
EAN 4016032425953

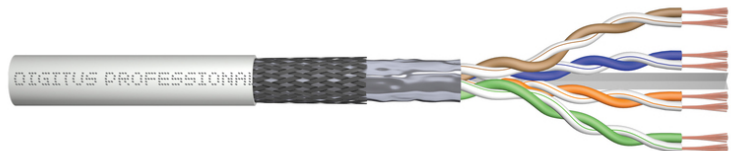

CAT 6 SF-UTP patch cable, raw 100 m, paper box, AWG 26/7, LSZH, sx, grey

Подходит для установки кабельных линий класса D, 100 МГц

Отличная производительность и качество связи для Вашей сети.

- Изоляция: полиэтилен высокой плотности
- Основной проводник: многожильный AWG 26/7
- Изоляция: PE
- Общее количество изолированных проводников: 8, свиты в 4 пары
- Цветовой код: сине-белый, оранжево-белый, зелено-белый, коричнево-белый
- Индивидуальная экранировка пар: отсутствует
- Общее экранирование: отсутствует

- Диапазон рабочей температуры: -10 °C до +60 °C
- Цвет: Серый (RAL 7035)
- Механические свойства
- Растяжение: 150 Н макс.
- Сопротивление петли по пост. току: 147 Ом/км макс. (2% макс. разбаланс сопротивлений)
- Assortment: Twisted Pair Patch Cables
- Category: CAT 6
- Shielding: SF-UTP, foil and braid shielding
- Length: 100 m
- Color: grey
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 4 | 17.70 | 42.00 | 31.00 | 31.00 | 40,362.00 |
| Packaging Unit Inside | 1 | 4.43 | 29.00 | 29.00 | 10.00 | 8,410.00 |
| Packaging Unit Single | 1 | 4.43 | 29.00 | 29.00 | 10.00 | 8,410.00 |
| Net single without Packaging | 1 | 3.80 | 10,000.00 | 6.30 | 6.30 | 0.00 |

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com