


DIGITUS colored pigtails, LC/APC OS2 09/125 μ , Simplex

DK-29332-02/APC
EAN 4016032428848

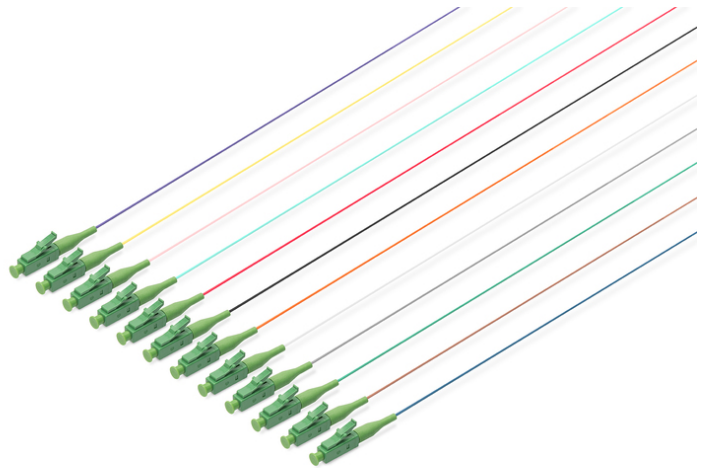

FO pigtail set, 12 pcs., LC (APC), SM OS2 09/125 μ loose buffer, color code DIN IEC 304, 2 m

The DIGITUS® Fiber Optic Colored Pigtails are available as LC Simplex, SC Simplex and ST Simplex version and offer with the classes OS2, OM2, OM3 and OM4 best performance and link quality for your network. The connector conforms acc. IEC 61754-4 2002 and is equipped with a Zirconia ceramic ferrule. The colored buffers are color coded according to IEC 304 (white, violet, turquoise, black, red, pink, orange, gray, green, yellow, brown, blue).

Future-oriented standards and high-end quality for your network.

- Simplex OS2 09/125 μ 2 m
- Standard connector acc. IEC 61754-4 2002
- Operating temperature: -25 °C ... +80 °C
- Storage temperature: -20 °C ... +65 °C
- Insertion loss MM PC: max. 0.4 dB

- Return loss MM PC: > 25 dB
- Zirconia ceramic ferrule
- Secondary coating dimensions: \varnothing 0.9 \pm 0.1 mm
- Primary coating: Acrylate; \varnothing 250 \pm 15 μ m
- Colored buffer, according to IEC 304 in the colors white, violet, turquoise, black, red, pink, orange, grey, green, yellow, brown, blue
- 12 pcs in package
- Loose buffer
- Boot: single-color
- Connector 1: LC (APC)
- Fiber class: OS2
- Fiber diameter: 9/125 μ
- Mode: Singlemode
- Length: 2 m

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 160 | 10.40 | 19.00 | 19.00 | 12.00 | 4,332.00 |
| Packaging Unit Inside | 1 | 0.07 | 17.00 | 19.00 | 0.10 | 32.30 |
| Packaging Unit Single | 1 | 0.07 | 17.00 | 19.00 | 0.10 | 32.30 |
| Net single without Packaging | 1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

More images:

