


DIGITUS Cat.6 U/UTP installation cable, 305 m, simplex, Dca-s2,d2,a1

DK-1614-VH-305
EAN 4016032435785

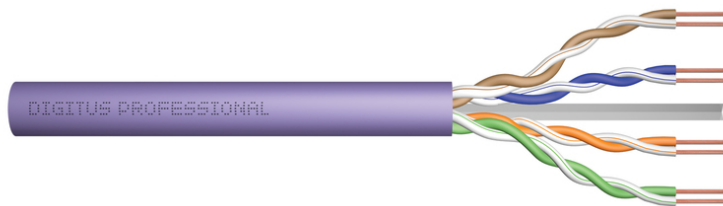

CAT 6 U-UTP installation cable, 250 MHz, AWG 23/1 Dca (LSZH-1), 305 m, paper box, simplex, purple

The Digitus Cat 6 U/UTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-6-1, DIN EN 50173, IEC 60332-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- System/s of AVCP: AVCP 3
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: None
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0,5 mm (Eca); 0,6 mm (Dca); 1,0 mm (Cca); 1,0 mm (B2ca)
- Outer sheath color: Purple (RAL 4005)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C


- Operating temperature range: -20 °C up to +75 °C
- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 6,1 mm (Eca); 6,3 mm (Dca); 6,8 mm (Cca); 6,8 mm (B2ca)
- Weight (kg/km): 41 kg (Eca); 42 kg (Dca); 44 kg (Cca); 44 kg (B2ca)
- Electrical properties:
- Impedance: 100±5Ohm @ 1 - 250MHz
- Capacitance: 40 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-ground): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 147 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 3
- Signal propagation delay: 535 nS/100 m max.
- Propagation delay: 20 nS/100 m max.
- Separating class: „b" gem. EN 50174-2
- NVP: 69%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: U-UTP, unshielded
- CPR: Dca
- Length: 305 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	12.30	45.00	44.50	25.00	50,062.50
Packaging Unit Inside	1	12.30	45.00	44.50	25.00	50,062.50
Packaging Unit Single	1	12.30	45.00	44.50	25.00	50,062.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:



CEC-Bewertung	Leistungsleistung	Leiterschichtstruktur (ZSH)	Abgleich der verifizierten Werte	Zertifizierung
B2ca	Sehr hoch Very high	1+	• Symmetrisch • Hohelektrische • Hohelektrische • Hohelektrische	S
Cca	Hoch High		• Symmetrisch • Hohelektrische	d
Dca	Mittel Medium	3	• Symmetrisch • Hohelektrische	a
Eca	Gering Low			


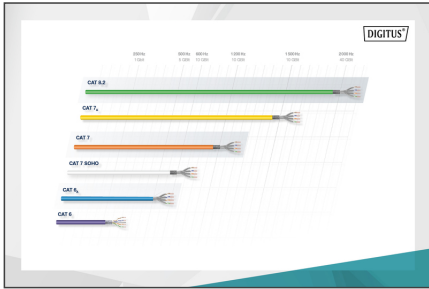


Certificate No. 25517-13-E and Zertifikat No. 25517-13-D. Includes GHMT logo and '2 Connector Channel, Class E, Class E' text.

Compliance Statement Intertek. Unscreened Class E / Category 6. Includes Intertek logo and 'Four Connector Channel' text.

Leitungsparameter Transmission Properties table with columns for AWG, NEXT, PR NEXT, ACR, PLR AC, PL, PLRXT, PR RXT.

Produktinformation Product Information and Mechanische Eigenschaften Mechanical Properties table with various technical specifications.

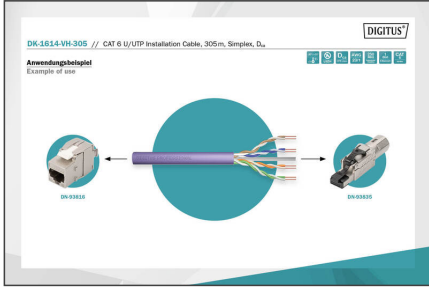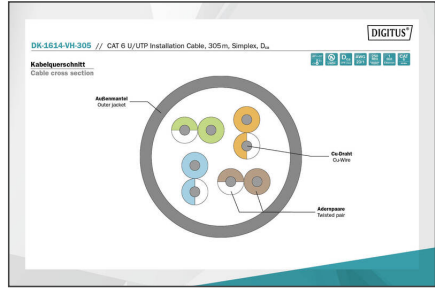

CAT 6 U/UTP Installation Cable, 305 m, Simplex, Dca. Includes icons for AWG 23/1, 250 MHz, 1 Gbit Ethernet, CAT 6, 305 m, LSZH, and Dca CPR class.

