


DIGITUS Cat.7 S/FTP installation cable, 500 m, simplex, B2ca

DK-1745-VH-5
EAN 4016032435884

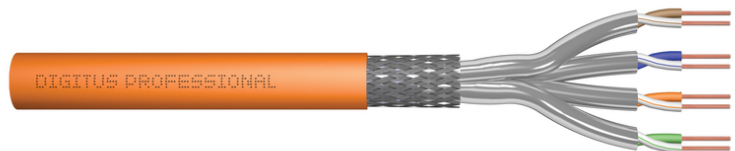

CAT 7 S-FTP installation cable, 1200 MHz B2ca (EN 50575), AWG 23/1, 500 m drum,

Adequado para a construção de cablagem estruturada na área secundária e terciária.

Melhor desempenho e melhor qualidade de ligação com a rede.

- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco

- Blindagem dos pares individuais: folha em poliéster oculta em alumínio, cobre 100%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: B2ca
- Length: 500 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	28.01	38.00	38.00	38.50	55,594.00
Packaging Unit Inside	1	28.01	38.00	38.00	38.50	55,594.00
Packaging Unit Single	1	28.01	38.00	38.00	38.50	55,594.00
Net single without Packaging	1	0.00	38.00	38.00	38.50	0.00

More images:



CAT 7 S/FTP Installation Cable, 500m, Simplex, B2_{ca}

- AWG 23/1
- 1200 MHz
- 10 Gbit Ethernet
- 100% LSZH
- B2_{ca} CPR class

DK-1745-VH-5 // CAT 7 S/FTP Installation Cable, 500m, Simplex, B2_{ca}

Anwendungsbeispiel
Example of use

DK-1745-VH-5 // CAT 7 S/FTP Installation Cable, 500m, Simplex, B2_{ca}

Kabelquerschnitt
Cable cross section

Produktinformationen Product Information

Technische Daten
 Produktbezeichnung: CAT 7 S/FTP Installation Cable, 500m, Simplex, B2_{ca}
 Artikelnummer: 1745-VH-5
 EAN: 4051123174550
 Hersteller: DIGITUS Professional

Physikalische Spezifikationen Physical Properties

Elektrische Eigenschaften Electrical Properties

Mechanische Eigenschaften Mechanical Properties

Linkenquerschnitt: Transmission Properties

PAIRS	ATT	NEXT	PS NEXT	ACR	PS ACR	RL	SLRXT	PS SLRXT
1	21	31	21	21	21	21	21	21
2	13	21	21	21	21	21	21	21
3	10	18	18	18	18	18	18	18
4	8	15	15	15	15	15	15	15
5	7	14	14	14	14	14	14	14
6	6	13	13	13	13	13	13	13
7	5	12	12	12	12	12	12	12
8	4	11	11	11	11	11	11	11
9	3	10	10	10	10	10	10	10
10	2	9	9	9	9	9	9	9

CE-Labeling

B2_{ca} Self-Healing
Very high

C_{ca} High
High

D_{ca} Minimal
Medium

E_{ca} Gearing
Low

Product code
C_{ca} s1a d1 a1

