


# DIGITUS Cat.7 S/FTP installation cable, 1000 m, simplex, B2ca

DK-1745-VH-10  
EAN 4016032435891

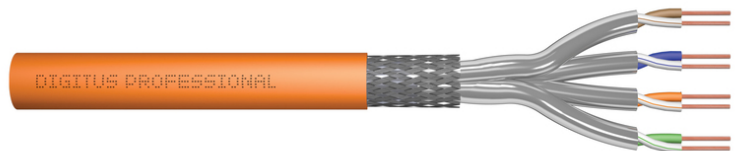

**CAT 7 S-FTP installation cable, 1200 MHz B2ca (EN 50575), AWG 23/1, 1000 m drum, Sx, orange**

Adequado para a construção de cablagem estruturada na área secundária e terciária.

**Melhor desempenho e melhor qualidade de ligação com a rede.**

- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco
- Blindagem dos pares individuais: folha em poliéster oculta em alumínio, cobre 100%


**Attributes**

- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: B2ca
- Length: 1000 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair



Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	47.00	55.00	55.00	35.00	105,875.00
Packaging Unit Inside	1	47.00	55.00	55.00	35.00	105,875.00
Packaging Unit Single	1	47.00	55.00	55.00	35.00	105,875.00
Net single without Packaging	1	0.00	55.00	55.00	35.00	0.00

**More images:**



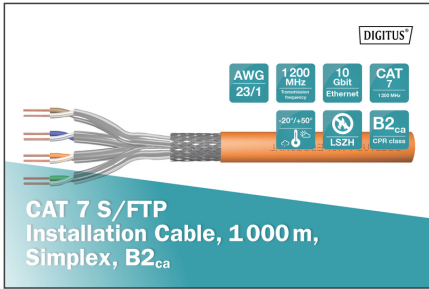


Produktdaten Product Information		Physikalische Spezifikationen Physical Properties	
Produktname	DIGITUS DK-1745-VH-10 // CAT 7 S/FTP Installation Cable, 1000m, Simplex, B2ca	Hersteller	DIGITUS Professional
Produktbeschreibung	1000m CAT 7 S/FTP Installation Cable, 1000m, Simplex, B2ca	Material	Polyester-Faserkabel, 100% Polyesterfaserkabel
Teilenummer	DIGITUS-DK-1745-VH-10-1000m	Standard	ISO/IEC 11801-2, EN 50173-1, EN 50173-2, EN 60332-1, EN 60332-2, EN 60754-2, EN 60754-3, EN 60754-4, EN 60754-5, EN 60754-6, EN 60754-7, EN 60754-8, EN 60754-9, EN 60754-10, EN 60754-11, EN 60754-12, EN 60754-13, EN 60754-14, EN 60754-15, EN 60754-16, EN 60754-17, EN 60754-18, EN 60754-19, EN 60754-20, EN 60754-21, EN 60754-22, EN 60754-23, EN 60754-24, EN 60754-25, EN 60754-26, EN 60754-27, EN 60754-28, EN 60754-29, EN 60754-30, EN 60754-31, EN 60754-32, EN 60754-33, EN 60754-34, EN 60754-35, EN 60754-36, EN 60754-37, EN 60754-38, EN 60754-39, EN 60754-40, EN 60754-41, EN 60754-42, EN 60754-43, EN 60754-44, EN 60754-45, EN 60754-46, EN 60754-47, EN 60754-48, EN 60754-49, EN 60754-50, EN 60754-51, EN 60754-52, EN 60754-53, EN 60754-54, EN 60754-55, EN 60754-56, EN 60754-57, EN 60754-58, EN 60754-59, EN 60754-60, EN 60754-61, EN 60754-62, EN 60754-63, EN 60754-64, EN 60754-65, EN 60754-66, EN 60754-67, EN 60754-68, EN 60754-69, EN 60754-70, EN 60754-71, EN 60754-72, EN 60754-73, EN 60754-74, EN 60754-75, EN 60754-76, EN 60754-77, EN 60754-78, EN 60754-79, EN 60754-80, EN 60754-81, EN 60754-82, EN 60754-83, EN 60754-84, EN 60754-85, EN 60754-86, EN 60754-87, EN 60754-88, EN 60754-89, EN 60754-90, EN 60754-91, EN 60754-92, EN 60754-93, EN 60754-94, EN 60754-95, EN 60754-96, EN 60754-97, EN 60754-98, EN 60754-99, EN 60754-100

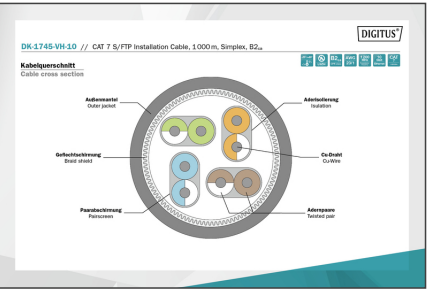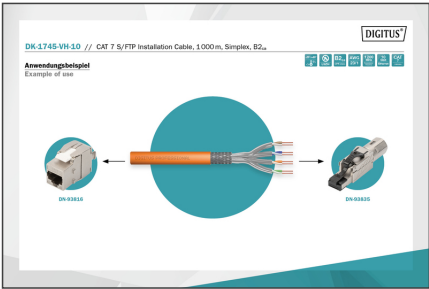

**Linkenparameter-Tabellen Transmittance Properties**

PROG	ATT	NEUT	PS NEXT	ACC	PS ACC	RL	ELXPT	PS ELXPT
100	16	16	16	16	16	16	16	16
1000	10	10	10	10	10	10	10	10
10000	6	6	6	6	6	6	6	6
100000	4	4	4	4	4	4	4	4

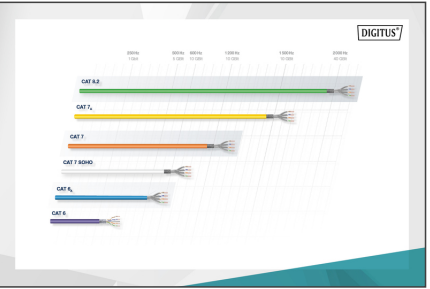

**Zusammenfassung Summary**

AWG: B2ca, 23/1  
 MHz: 1200  
 Ethernet: 10 Gbit  
 Class: CAT 7  
 CPR Class: B2ca



**Safety notes**

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)