

DIGITUS Repartidor industrial Gigabit PoE++, 802.3bt

DN-651111
EAN 4016032441182



Industrial Gigabit PoE++ Splitter, 802.3bt selectable power output: 12VDC,16VDC,24VDC,48VDC

O repartidor DIGITUS® Industrial Gigabit PoE está concebido para ambientes agrestes, nos quais fica exposto à humidade, variações de temperatura e vibrações. Com uma amplitude de temperaturas de -40°C até 75°C, o repartidor Industrial Gigabit PoE pode ser utilizado nas condições mais adversas. Assegura uma disponibilidade constante nas áreas altamente sensíveis, tais como de transporte, produção, trânsito e monitorização de segurança. Graças ao fácil sistema plug-and-play, é possível integrar rapidamente o repartidor Industrial Gigabit PoE no respetivo ambiente. O DIGITUS® DN-651111 é um repartidor Industrial Gigabit PoE Plug & Play não gerido, numa caixa de alumínio protegida IP30 robusta. Graças à conectividade Gigabit, bem como à tensão selecionável que pode ser fornecida para dispositivos não compatíveis com PoE, o repartidor Industrial Gigabit PoE representa uma solução flexível e económica para o setor industrial. Pode ser efetuada seleção da tensão de alimentação na faixa de 12 VCC, 16 VCC, 24 VCC ou 48 VCC. Através da norma IEEE802.3bt é possível ocorrer uma alimentação de até 95 Watts por PoE. São disponibilizadas duas saídas de corrente paralelas para dispositivos terminais.

- Repartidor Gigabit com abastecimento até 95 Watt PoE


- Tensão de saída flexivelmente ajustável: 12 VCC, 16 VCC, 24 VCC, 48 VCC
- Saída de dados Gigabit para ligação de rede
- Compatível com versões anteriores, de acordo com a norma IEEE802.3af/at
- Tecnologia Store-and-Forward para uma transferência de dados otimizada
- Auto MDI/Função MDI-X
- LED de diagnóstico sobre o estado e monitorização de atividade
- Temperatura de funcionamento: -40°C a +75°C
- PoE standard: IEEE802.3bt (PoE++)
- Ethernet speed: Gigabit
- Power output: 55 W
- Industrial usage: yes
- Managed: no
- Outdoorsuitable: no
- PoE (Power over Ethernet): no
- Protection against vanadism: no
- VLAN: no

Package contents

- Repartidor industrial Gigabit PoE++, 802.3bt
- Peso: 20 g

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	16	7.00	56.00	35.00	24.00	47,040.00
Packaging Unit Inside	1	0.44	21.50	6.50	16.50	2,305.88
Packaging Unit Single	1	0.44	21.50	6.50	16.50	2,305.88
Net single without Packaging	1	0.15	10.40	3.20	8.20	0.00

More images:

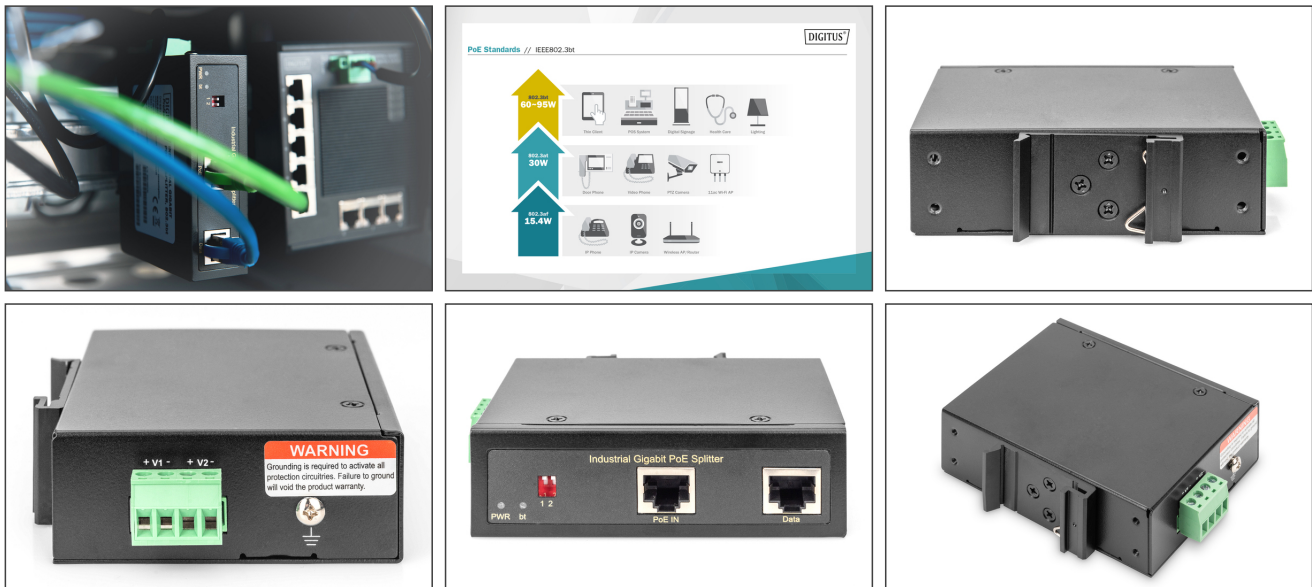

Safety notes

- This product is intended for indoor use only.
- Read all instructions and follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and send it to an authorized service centre for repair
- The mains cable, power supply unit or plug for the power supply is damaged or worn;
- Liquid has penetrated the appliance;
- The device has been exposed to rain or water;
- The device has been dropped or the housing has been damaged;
- The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com