


# DIGITUS CAT 6 S/FTP patch cord, 10 units

DK-1644-0025-G-10  
EAN 4016032441335

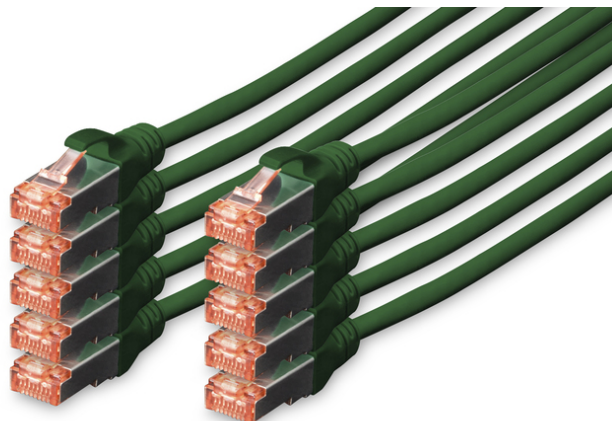

### CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 0.25 m, 10 pieces, color green

Os cabos de interconexões DIGITUS® da categoria 6, classe E são produzidos e testados segundo as normas ISO/IEC 11801 e DIN EN 50173 CAT 6. Os cabos de interconexões DIGITUS® garantem que a instalação dos cabos corresponda à especificação de canal ISO & EN e oferecem um excelente desempenho na cablagem CAT 6 DIGITUS®. A nova manga de proteção contra torção com proteção de alavanca de engate evita que os cabos se ensarilhem e protege simultaneamente a alavanca de engate contra quebras. A cor vermelha dos conectores permite uma rápida identificação da categoria 6 dos mesmos.




#### Melhor desempenho e melhor qualidade de ligação com a rede.


- 2x Conectores RJ45 (8P8C)
- Coberturas com proteção contra dobras, redução de tensão e proteção contra alavanca de retenção

- Indicação de comprimento nas tampas
- Condutor interno: Cobre (Cu)
- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: DIGITUS Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 0.25 m
- Color: green
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	25	4.90	36.00	36.00	24.00	31,104.00
Packaging Unit Inside	10	1.96	5.20	22.00	28.00	3,203.20
Packaging Unit Single	1	0.20	1.60	11.50	21.00	386.40
Net single without Packaging	1	0.02	25.00	1.20	1.30	0.00

#### More images:

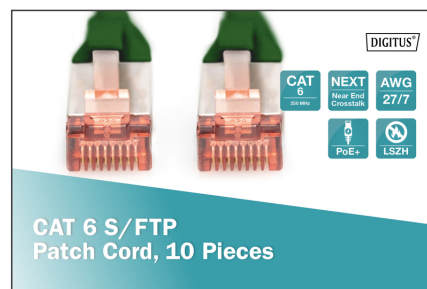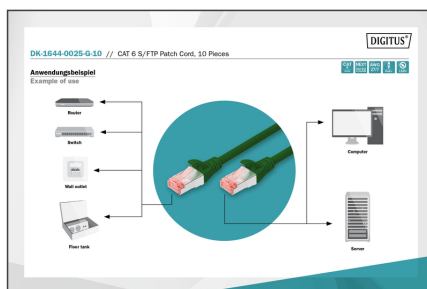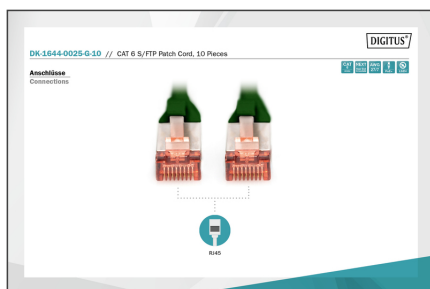

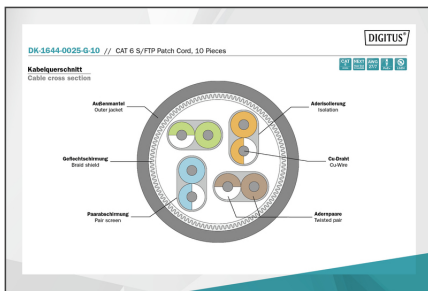

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable.
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)