


DIGITUS Cat.7A S/FTP installation cable, 1000 m, simplex, Cca

DK-1744-A-VH-10
EAN 4016032441694

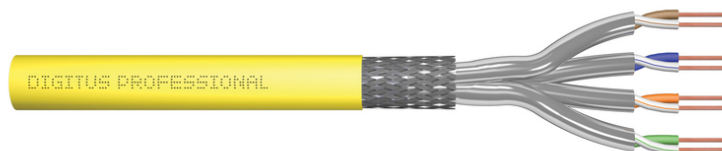

CAT 7A S-FTP installation cable, 1500 MHz Cca (EN 50575), AWG 22/1, 1000 m drum, SX, yellow

Подходит для создания структурированной проводки в вторичной и третичной зонах



Отличная производительность и качество связи для Вашей сети.

- Физическое описание
- Общее количество изолированных проводников: 8, свиты в 4 пары

- Цветовой код: сине-белый, оранжево-белый, зелено-белый, коричнево-белый
- Экранирование отдельных пар: алюминиевая фольга, 100% охват
- Механические свойства
- Растяжение: 150 Н макс.
- Температурный диапазон монтажа: 0°C до +50°C
- Среднее полное сопротивление: 100±5 Ом @ 1-600 МГц
- Сопротивление петли по пост. току: 147 Ом/км макс. (2% макс. разбаланс сопротивлений)

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	4	280.00	53.00	53.00	43.50	122,192.00
Packaging Unit Inside	1	70.00	53.00	53.00	43.50	122,192.00
Packaging Unit Single	1	70.00	53.00	53.00	43.50	122,192.00
Net single without Packaging	1	69.25	0.00	0.00	0.00	0.00

More images:

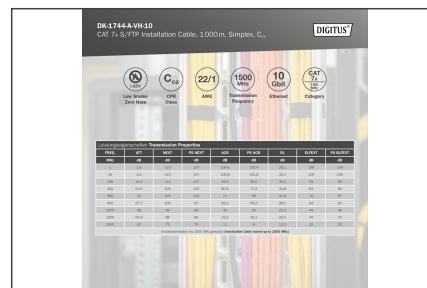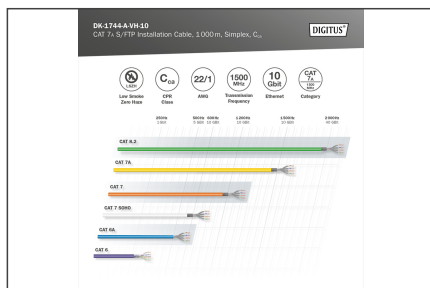

DK-1744-A-VH-10
CAT 7, S/FTP Installation Cable, 1.000m, Simplex, C₁₂

Product Information	Technical Specification	Product Properties
Product description CAT 7, S/FTP Installation Cable, 1.000m, Simplex, C ₁₂	General Part number: DK-1744-A-VH-10 EAN: 4052767000000 Weight: 0,40 kg Dimensions: 1000 x 10 x 10 mm	General Part number: DK-1744-A-VH-10 EAN: 4052767000000 Weight: 0,40 kg Dimensions: 1000 x 10 x 10 mm
Technical Specification Cable type: Simplex Cable length: 1000 m Cable diameter: 10 mm Jacket material: PVC Jacket thickness: 1,2 mm Jacket color: Yellow	Electrical Properties Cable type: CAT 7 Cable length: 1000 m Cable diameter: 10 mm Jacket material: PVC Jacket thickness: 1,2 mm Jacket color: Yellow	Product Properties Cable type: CAT 7 Cable length: 1000 m Cable diameter: 10 mm Jacket material: PVC Jacket thickness: 1,2 mm Jacket color: Yellow



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com