


DIGITUS Cat.7A S/FTP, installation cable, 500 m, duplex, Cca

DK-1744-A-VH-D-5
EAN 4016032441700

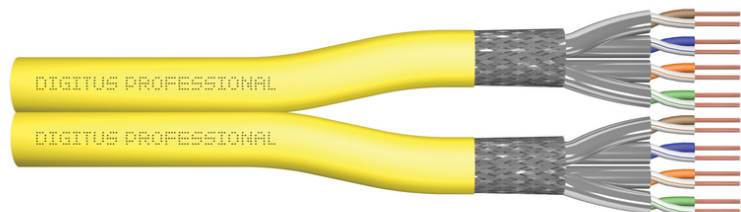

CAT 7A S-FTP installation cable, 1500 MHz Cca, (EN 50575), AWG 22/1, 500 m drum, DX, yellow



Adequado para a construção de cablagem estruturada na área secundária e terciária.

Melhor desempenho e melhor qualidade de ligação com a rede.


- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco
- Blindagem dos pares individuais: folha em poliéster oculta em alumínio, cobre 100%

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	71.00	50.00	53.00	53.00	140,450.00
Packaging Unit Inside	1	71.00	50.00	53.00	53.00	140,450.00
Packaging Unit Single	1	71.00	50.00	53.00	53.00	140,450.00
Net single without Packaging	1	71.00	0.00	0.00	0.00	0.00

More images:

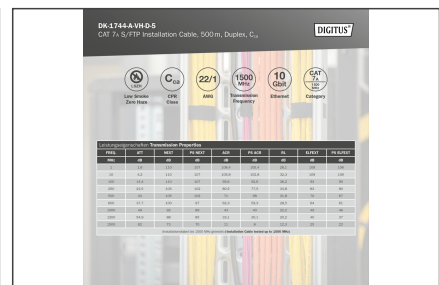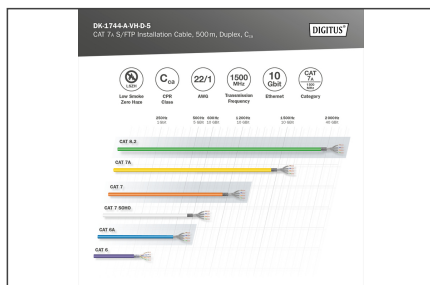

DK-1744-A-VH-D-5		DIGITUS®
CAT 7.5/FTP Installation Cable, 500m, Duplex, C ₁₂		
Product Information	Technical Specifications	Physical Properties
<p>Product description: CAT 7.5/FTP Installation Cable, 500m, Duplex, C₁₂</p> <p>Product code: DK-1744-A-VH-D-5</p> <p>Product group: CAT 7.5/FTP Installation Cable</p> <p>Manufacturer: ASSMANN Electronic GmbH</p>	<p>Cable type: CAT 7.5/FTP Installation Cable</p> <p>Length: 500m</p> <p>Conductor type: Twisted pair</p> <p>Shielding: Shielded</p> <p>Construction: Duplex</p> <p>Standard: ISO/IEC 11801 Class EA, ANSI/TIA-568-C.3 Class EA</p>	<p>Outer jacket: Polyethylene</p> <p>Outer jacket color: Black</p> <p>Outer jacket thickness: 1.2mm</p> <p>Outer diameter: 10.5mm</p> <p>Inner diameter: 8.5mm</p> <p>Weight: 0.22kg</p>
Electrical Properties	Performance Properties	Material Properties
<p>Attenuation: ≤ 20.5dB/100m (at 100MHz)</p> <p>Return loss: ≥ 15dB (at 100MHz)</p> <p>Propagation delay: ≤ 5.5ns/m</p> <p>Capacitance: ≤ 50pF/m</p> <p>Dielectric constant: ≤ 2.2</p>	<p>Transmission frequency: ≤ 600MHz</p> <p>Bandwidth: ≤ 10Gb/s</p> <p>Temperature range: -40°C to +75°C</p> <p>Humidity: ≤ 95% RH</p> <p>UV resistance: ≥ 100h</p>	<p>Material: Polyethylene</p> <p>Flame retardancy: IEC 60332-1</p> <p>Smoke density: IEC 61034-1</p> <p>Halogen-free: Yes</p> <p>RoHS compliant: Yes</p> <p>REACH compliant: Yes</p>

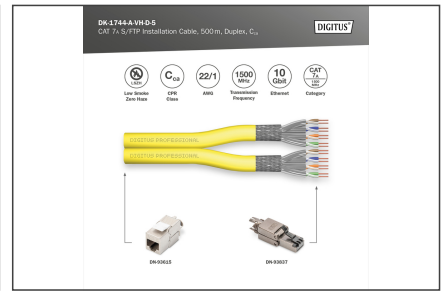

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com