


# DIGITUS CAT 6 S/FTP patch cord, 10 units

**DK-1644-030-G-10**  
**EAN 4016032441939**

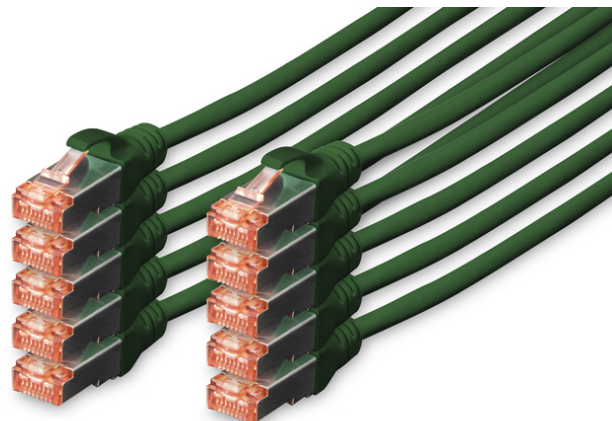

**CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 3 m, 10 pieces, color green**





Os cabos de interconexões DIGITUS® da categoria 6, classe E são produzidos e testados segundo as normas ISO/IEC 11801 e DIN EN 50173 CAT 6. Garantem que a instalação dos cabos corresponda à especificação de canal ISO & EN e oferecem um excelente desempenho da cablagem CAT 6 DIGITUS®. A capacidade foi testada até 250 MHz, incluindo as características de capacidade, como, por exemplo, a paradiáfonia ("NEXT (PRÓXIMO)"). Os cabos de interconexões DIGITUS® foram especialmente desenvolvidos para responder a todas as necessidades em diferentes áreas de utilização num âmbito total. Cada cabo está equipado com uma manga de proteção contra torção moldada com tração reduzida. Além disso, a manga contém uma proteção de alavanca de engate, que impede que os cabos se ensarilhem, bem como que o conector saia da alavanca de engate. A cor vermelha dos conectores permite uma rápida identificação da categoria 6 dos mesmos.

**CAT 6 S/FTP patch cord, 10 units**

- 2x Conectores RJ45 (8P8C)
- Coberturas com proteção contra dobras, redução de tensão e proteção contra alavanca de retenção
- Indicação de comprimento nas tampas
- Conductor interno: Cobre (Cu)
- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: DIGITUS Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 3 m
- Color: green
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	8	8.50	36.00	36.00	30.00	38,880.00
Packaging Unit Inside	1	1.06	15.40	30.00	36.00	16,632.00
Packaging Unit Single	1	1.06	1.60	17.00	25.00	680.00
Net single without Packaging	1	0.09	300.00	1.20	1.30	0.00

**More images:**

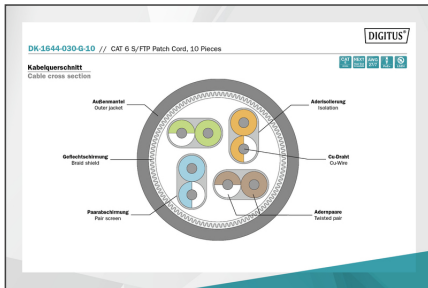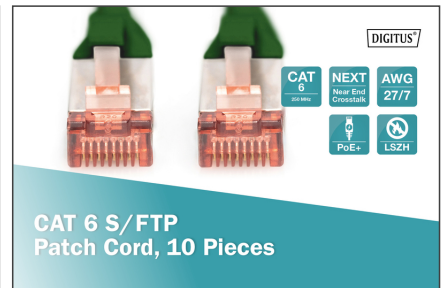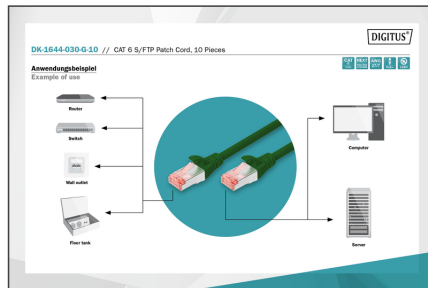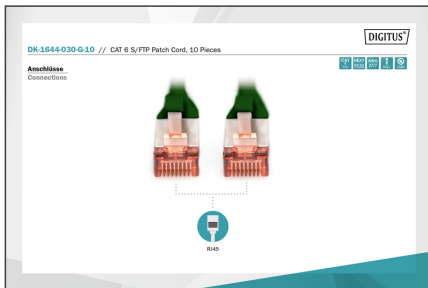

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Ensure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)