


DIGITUS Cat.6 F/UTP installation cable, 500 m, simplex, Cca

DK-1625-VH-5
EAN 4016032442035

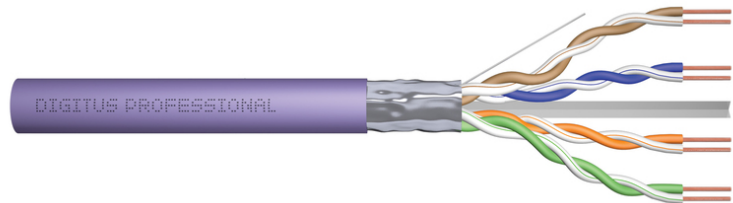

CAT 6 F-UTP installation cable, 250 MHz Cca (EN 50575), AWG 23/1, 500 m drum, sx, purple

The Digitus® Professional Cat.6 F/UTP installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 250 MHz. The halogen free cable jacket is conform to the standard IEC 60332-3-24, FRNC-C, LSZH-1 and CPR Euro class Cca. The cable is suitable for building structured cabling in the secondary and tertiary area. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-5-1.


Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: Aluminum foil, providing 100% coverage, drain wire
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0.5 mm (Eca); 0,6 mm (Dca); 0,8 mm (Cca); 0,08 mm (B2ca)
- Outer sheath color: Purple
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.

- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C
- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7.0 (Eca); 7,2 mm (Dca); 7,6 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 46 kg (Eca); 47 kg (Dca); 48,5 kg (Cca); 48,5 kg (B2ca)
- Electrical properties:
- Impedance: 100±5 Ohm @ 1-250 MHz
- Capacitance: 45 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-ground): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 147 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: 40 dB
- Signal propagation delay: 535 nS/100 m max.
- Propagation delay: 20 nS/100 m max.
- Separating class: „c“ acc. to EN 50174-2
- NVP: 69%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: F-UTP, foil shielding
- CPR: Cca
- Length: 500 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	28.50	50.00	50.00	22.00	55,000.00
Packaging Unit Inside	1	28.50	0.00	0.00	0.00	0.00
Packaging Unit Single	1	28.50	50.00	50.00	22.00	55,000.00
Net single without Packaging	1	27.82	50.00	50.00	22.00	0.00

More images:


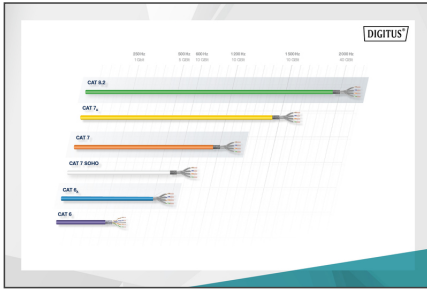



Leitungsmodularen Transmissionsparameter

PROZ.	ATT	REFL	RE NEXT	RE	RE NEXT	RE	RE NEXT	RE NEXT	RE NEXT
1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
3	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
4	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
5	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
6	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
7	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
8	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
9	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1
10	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1

Produktinformation Product Information

Hersteller/Manufacturer	Digitus (China, Taiwan, Hong Kong, Korea, Thailand)	Teilenummer/Part Number	DK-1625-VH-5
Produkttyp/Product Type	Netzwerk-Kabel/Network Cable	Material/Material	AWG 23/1, 250 MHz, 1 Gbit Ethernet
Normen/Standards	ISO/IEC 11801, ISO/IEC 11801-1, ISO/IEC 11801-2, ISO/IEC 11801-3, ISO/IEC 11801-4, ISO/IEC 11801-5, ISO/IEC 11801-6, ISO/IEC 11801-7, ISO/IEC 11801-8, ISO/IEC 11801-9, ISO/IEC 11801-10, ISO/IEC 11801-11, ISO/IEC 11801-12, ISO/IEC 11801-13, ISO/IEC 11801-14, ISO/IEC 11801-15, ISO/IEC 11801-16, ISO/IEC 11801-17, ISO/IEC 11801-18, ISO/IEC 11801-19, ISO/IEC 11801-20, ISO/IEC 11801-21, ISO/IEC 11801-22, ISO/IEC 11801-23, ISO/IEC 11801-24, ISO/IEC 11801-25, ISO/IEC 11801-26, ISO/IEC 11801-27, ISO/IEC 11801-28, ISO/IEC 11801-29, ISO/IEC 11801-30, ISO/IEC 11801-31, ISO/IEC 11801-32, ISO/IEC 11801-33, ISO/IEC 11801-34, ISO/IEC 11801-35, ISO/IEC 11801-36, ISO/IEC 11801-37, ISO/IEC 11801-38, ISO/IEC 11801-39, ISO/IEC 11801-40, ISO/IEC 11801-41, ISO/IEC 11801-42, ISO/IEC 11801-43, ISO/IEC 11801-44, ISO/IEC 11801-45, ISO/IEC 11801-46, ISO/IEC 11801-47, ISO/IEC 11801-48, ISO/IEC 11801-49, ISO/IEC 11801-50, ISO/IEC 11801-51, ISO/IEC 11801-52, ISO/IEC 11801-53, ISO/IEC 11801-54, ISO/IEC 11801-55, ISO/IEC 11801-56, ISO/IEC 11801-57, ISO/IEC 11801-58, ISO/IEC 11801-59, ISO/IEC 11801-60, ISO/IEC 11801-61, ISO/IEC 11801-62, ISO/IEC 11801-63, ISO/IEC 11801-64, ISO/IEC 11801-65, ISO/IEC 11801-66, ISO/IEC 11801-67, ISO/IEC 11801-68, ISO/IEC 11801-69, ISO/IEC 11801-70, ISO/IEC 11801-71, ISO/IEC 11801-72, ISO/IEC 11801-73, ISO/IEC 11801-74, ISO/IEC 11801-75, ISO/IEC 11801-76, ISO/IEC 11801-77, ISO/IEC 11801-78, ISO/IEC 11801-79, ISO/IEC 11801-80, ISO/IEC 11801-81, ISO/IEC 11801-82, ISO/IEC 11801-83, ISO/IEC 11801-84, ISO/IEC 11801-85, ISO/IEC 11801-86, ISO/IEC 11801-87, ISO/IEC 11801-88, ISO/IEC 11801-89, ISO/IEC 11801-90, ISO/IEC 11801-91, ISO/IEC 11801-92, ISO/IEC 11801-93, ISO/IEC 11801-94, ISO/IEC 11801-95, ISO/IEC 11801-96, ISO/IEC 11801-97, ISO/IEC 11801-98, ISO/IEC 11801-99, ISO/IEC 11801-100		

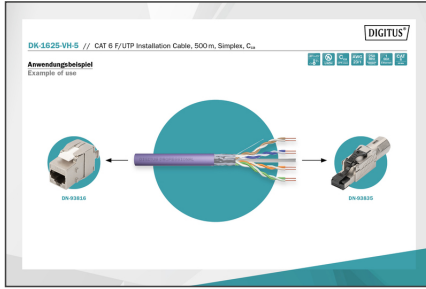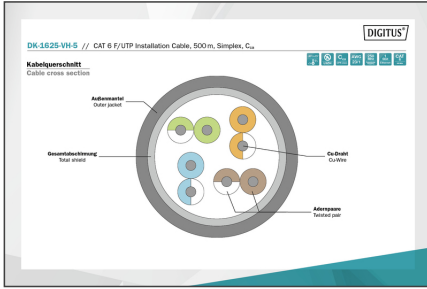

CAT 6 F/UTP Installation Cable, 500 m, Simplex, C_{ca}

