


DIGITUS Cat.7 S/FTP installation cable, 305 m, simplex, Dca-s1a,d0,a1

DK-1743-VH-305-MF-W
EAN 4016032454557

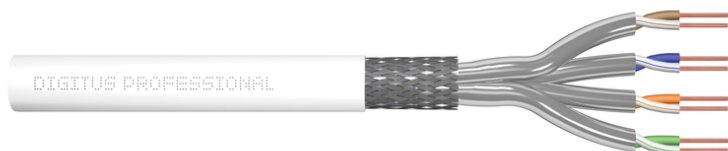

CAT 7 S-FTP installation cable, 305 m, box, 1200MH AWG 26/1, 600 MHz, Dca, LSZH-3, color RAL9003

The DIGITUS® Cat.7 S/FTP installation cable is characterized by the following cable construction 4x2x AWG 26/1 and reaches a transmission frequency up to 1200 MHz. The halogen free cable jacket is conform to the standard IEC 60332-3-24, FRNC-C, LSZH-3 and CPR Euro class Dca. The cable is suitable for laying in residential as well as SoHo areas.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 26/1
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: Aluminum-laminated polyester film, covers 100%
- Overall shielding: copper braiding
- Outer sheath: Dca acc. to EN 50575; LSZH
- Outer sheath thickness (nominal): 0.52 mm nominal
- Outer casing color: White (RAL 9003)
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C
- Operating temperature range: -20 °C to +50 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter simplex (nominal): 5.7 mm nominal


- Weight (kg/km): 35 kg/km
- Electrical properties:
- Impedance: 100±15Ohm @ 4 - 100MHz; 100±25Ohm @ 100 - 600MHz
- Capacitance: 45 pF/m nominal @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 95 Ohm/km max. (2% max. unbalanced resistance)
- Loop resistance: 190 Ohm/Km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Phase delay: 450 nS/100 m max.
- Time delay: 25 nS/100 m max.
- Separation class: "d" according to EN 50174-2
- Maximum insert length: 60 m
- NVP: 79%
- Flame spread: EN 60332-1-2 (LSOH-PVC)
- Halogen-free, corrosiveness: EN 60754-1/2 (LSOH)
- Smoke density EN 61034-2

Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 305 m
- Color: white
- Jacket: LSOH
- Structure: 4 x 2 AWG 26/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	12.76	43.00	23.00	43.00	42,527.00
Packaging Unit Inside	1	12.76	43.00	23.00	43.00	42,527.00
Packaging Unit Single	1	12.76	43.00	23.00	43.00	42,527.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

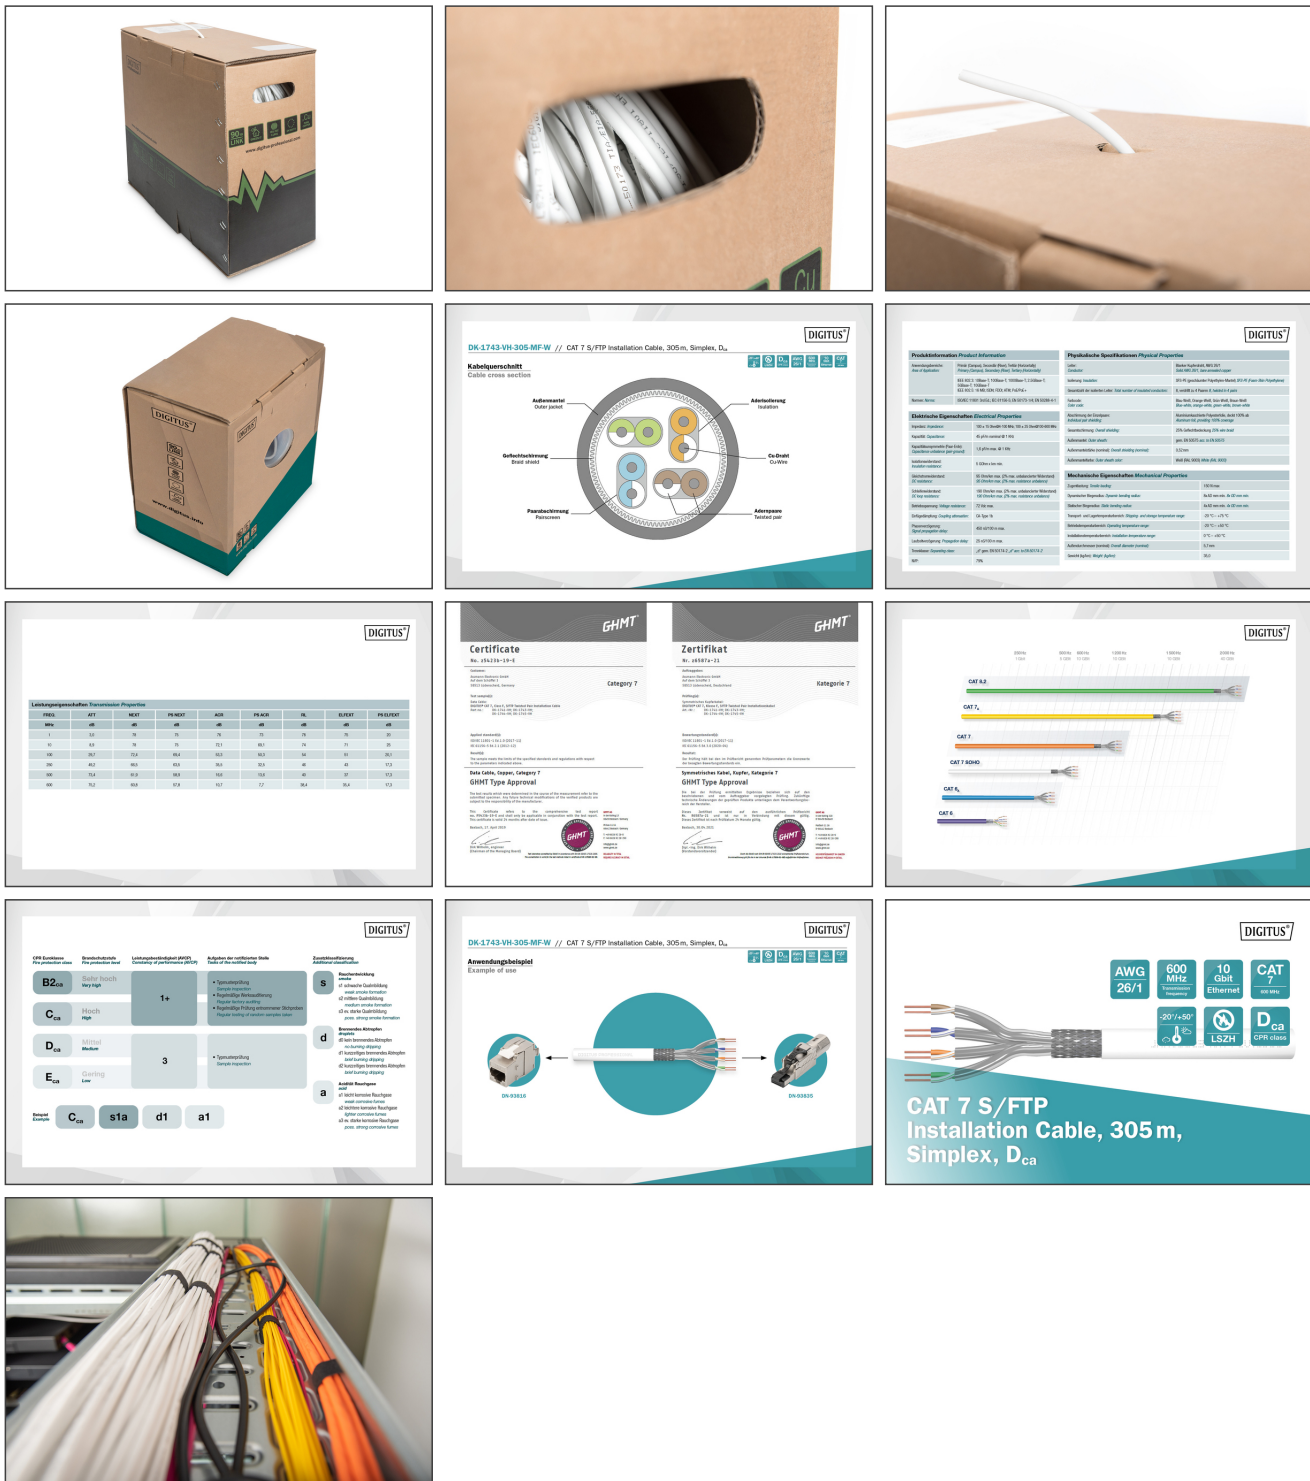

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com