

DIGITUS SATA III RAID PCIe Add-On Card 2.5" HDD / SSD, 2 Port

DS-33160
EAN 4016032464402



SATAIII RAID PCIeexpress Add-On card 2-channel for 2.5" HDD/SSD

The DIGITUS® 2-port RAID card with two SATA III interfaces features a host controller that manages two full-fledged 2.5-inch SSD/HDD hard disks and brings server-class functions to your desktop. This card enables the use of the latest and fastest hard disks with 6 Gbps and also offers backwards compatibility with older SATA 1.5 / 3 Gbps standards. Each PCI-Express 2.0 lane offers a capacity of up to 500 MB/s. The SATA HDD/SSDs can be operated as JBOD or as RAID (RAID 0 or RAID 1).

Extends your system with 2 x SATA III interfaces including RAID function

- Connectors: 2 x SATA III 6Gb/s
- Installation: 2 x 2.5" HDD/SSD
- Chipset: Marvell / 88SE9230
- Compatible with PCIe specification V 2.0, backwards compatible with 1.1

- Supports 6 Gbps, 3 Gbps & 1.5 Gbps hard disks
- Conforms with serial ATA specification 3.1
- PCIe X2 interface, compatible with X4, X8 & X16
- Supports Gen1i, Gen2i, Gen2m, Gen2x & Gen3i
- Supports Native Command Queue (NCQ)
- Supports Port Multiplier FIS Based Switching or Command Based Switching
- Supports Partial and Slumber Power Management settings
- Supports functions: JBOD, RAID 0, RAID 1 and Marvell HyperDuo
- Supports Windows 10, 8, 7 / Windows server 2003, 2008 R2, DOS
- Supports Hot Plugging & Hot Swapping




Package contents


- 1 x SATA III RAID PCIe Add-On Card 2.5" HDD / SSD, 2 Port
- 1 x Driver CD
- 1 x Quick reference guide

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	50	7.75	38.00	49.00	34.50	64,239.00
Packaging Unit Inside	1	0.16	22.00	16.00	3.00	1,056.00
Packaging Unit Single	1	0.16	15.50	22.00	3.00	1,023.00
Net single without Packaging	1	89.00	12.10	18.00	2.00	0.00

More images:

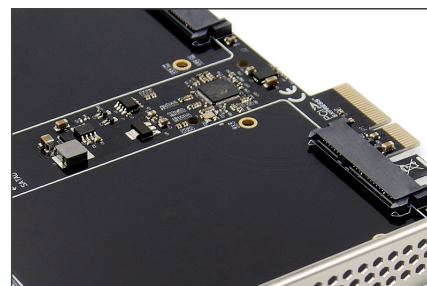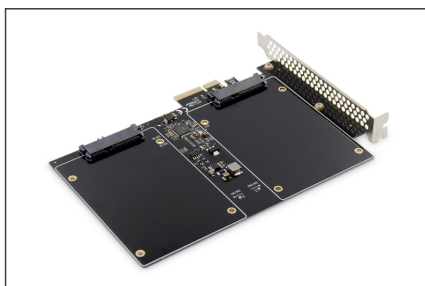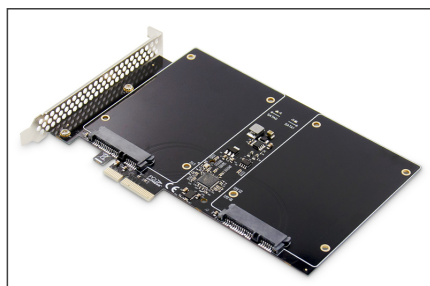

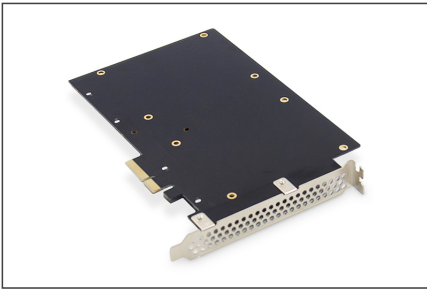**Safety notes**

- Switch off the computer completely and disconnect it from the power supply before installing or removing the network card.
- Static discharge can damage the product or the PC. Take measures against static discharge (ESD) when installing the product, e.g. wear an antistatic wrist strap.
- Before installation, touch the metal surface of the PC housing or another grounded object to ground any ESD charge via the housing.
- Avoid using too much force when connecting the product to the PC.
- Please ensure that any cables are connected correctly without overstretching or damaging them.
- Avoid touching the contacts of the product with your fingers to prevent corrosion or static charge.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com