

# DIGITUS FTTH Micro Splice Distributor for 2 x SC SX / 2 x LC DX

DN-931091  
EAN 4016032466215



### Micro Fiber Optic Distribution Box 4x fibers, w/o adapters for 2x SC SX, 2x LC DX

Keep things neat and tidy! The micro splice distributor from DIGITUS® is primarily designed for FTTH (fiber to the home) applications and can hold either 2 x SC Simplex or 2 x LC Duplex plug connections. In addition, a splice holder is included that allows you to install up to 4 splice connections securely in the housing. The housing consists of a base plate, center plate and cover and is designed for wall mounting. Four cable entry grommets, two cable brackets with adhesive surfaces and cable ties to fix the cables in place are also included in delivery.

### Micro Splice Distributor for 2 x SC Simplex, 2 x LC Duplex Plug Connections

- Suitable for 2 x SC Simplex or 2 x LC Duplex connectors / couplings

- Cable entry points 2 x each side or on the back side optional
- Including mounting material, cable feedthrough grommets & splice holder
- Dimensions: 160 x 110 x 30 mm (L x W x H)
- Weight: 179 g (base plate, center plate, cover)
- Color: RAL 7035 (light gray)


### Package contents

- 1 x FTTH Micro Splice Distributor for 2 x SC / Simplex, 2 x LC / Duplex
- 4 x cable entry grommets
- 4 x cable ties
- 2 x cable brackets with adhesive pad
- Installation instruction

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	50	15.00	38.00	52.00	40.00	79,040.00
Packaging Unit Inside	1	0.30	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.30	16.00	17.50	4.00	1,120.00
Net single without Packaging	1	0.19	11.00	16.00	3.00	0.00

### More images:

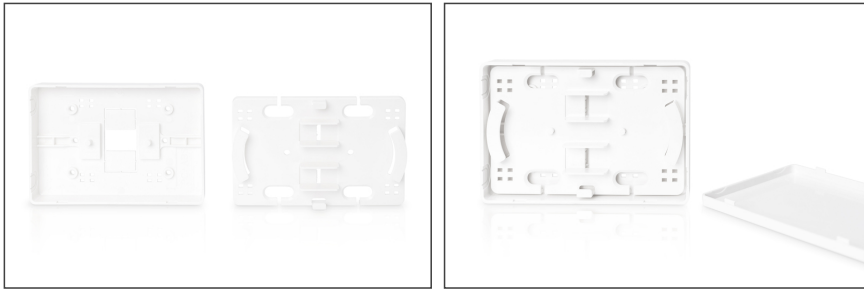

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)