


DIGITUS CAT 6 Keystone Jack, unshielded - 24 pieces

DN-93603-24
EAN 4016032466420

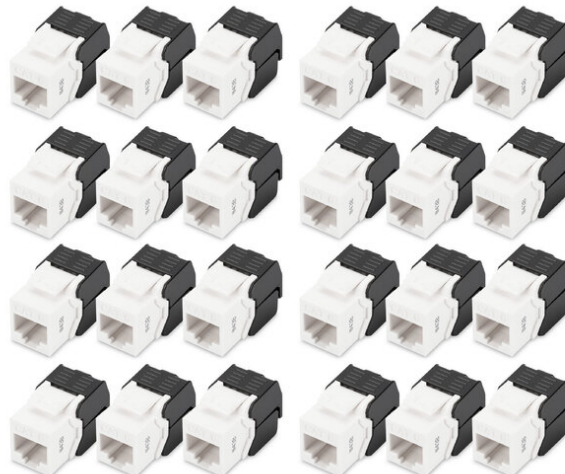

CAT 6 Keystone Jack, unshielded tool free connection, 24 pcs set

The Item "DN-93603-24" from DIGITUS® is an unshielded Keystone Module with tool free installation which provides best performance and link quality for your network. The compact design allows the installation of 24 pieces in a row of 483 mm (19") 1U Panels.

Future-oriented standards and high-end quality for your network.

- Transmission properties: Category 6
- Area of application: Up to 250 MHz, 1GBase-T
- Norms: ISO/IEC 11801 3rd Ed., EN 50173-1, EIA/TIA 568-C
- General properties:
- Suitable for 483 mm (19") cabinet mounting
- RJ45 female, 8P8C
- Cable installation via LSA strips, color coded according to EIA/TIA 568 A & B
- Cable fixing with smart cable ties
- Tool-free installation
- Technical properties:
- RJ45 female material: ABS UL 94V-0

- LSA termination clamp: Krone LSA+, UL 94V-2, zinc plated phosphor bronze
- Conductor plate: FR4, UL 94V-0
- Physical properties:
- Insertion force: 30N max. (IEC 60603-7-5)
- Retention strength: 7.7 kg between jack and plug
- Operation temperature: -20° C to +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Mating cycles female: > 750 acc. to ISO/IEC 11801, IEC 60603-7-5
- Clamp: > 200 acc. to ISO/IEC 11801, IEC 60603-7-5
- IDC wire size: 22 – 26 AWG solid and stranded conductor
- Insulation resistance: > 500 MOhm
- Contact resistance: < 20 MilliOhm
- Dielectric strength: 1000 VDC (Contact/Contact), 1500 VDC (Contact/Ground)
- 24 pieces

Attributes

- Category: CAT 6

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|----------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 1 | 0.30 | 18.00 | 12.00 | 7.00 | 1,512.00 |
| Packaging Unit Inside | 1 | 0.30 | 18.00 | 12.00 | 7.00 | 1,512.00 |
| Packaging Unit Single | 1 | 0.30 | 18.00 | 12.00 | 7.00 | 1,512.00 |
| Net single without Packaging | 1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com