

DIGITUS HDMI High Speed connection cable with Ethernet and signal amplifier

DB-330118-100-S
EAN 4016032468721



HDMI High Speed Connection Cable, Type A, w/amp. M/M, 10.0m, Ultra HD, 4K@30Hz, gold, bl

This active HDMI Cable is ideally suited for transferring video and audio data with high bandwidth over longer distances. With its integrated signal amplifier, it ensures lossless transmission over the entire cable length with UHD resolutions of up to 4K / 30 Hz. It is ideal for use in homes, meeting rooms, and conference rooms as well as within buildings — and these are just a few of the possible uses. The simple Plug & Play installation is user-friendly; just plug it in and immediately enjoy optimal image quality. Supports numerous standards, such as HEC, CEC as well as Full HD 3D HFR, Deep Color and Multistream support. In the audio area, ARC, DTS-HD Master Audio or Dolby TrueHD are supported, among others, as well as many other features.

UHD-compatible HDMI cable with signal amplifier and Ethernet support (HEC)

- Supports HDMI 1.4 features
- Supports up to 4K / 30 Hz (3840 x 2160p)
- Supported Audio format: DVD-Audio, SACD, Dolby Digital Plus, TrueHD and dts-HD
- Support of 3D with 1080p resolution
- With Ethernet Channel (HEC)
- Supports 1080p 3D HFR


- Supports Deep Color 30bit
- Supports Audio Return Channel (ARC)
- Supports Consumer Electronic Control (CEC)
- Supports Lip-Sync (Audio/Video Synchronisation)
- Supports Multi Stream Audio/Video
- Supports 32-Kanal Audio
- Supports Blu-Ray und HD-DVD Audio/Video
- Supports EDID 2.0 (Device detection)
- Supports DVI Version 1.0
- Operating temperature: -10 ~ 50°C
- Operating humidity: 10 - 80% RH

Attributes

- AWG: 28
- Color cable: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Resolution max.: 3840 x 2160 Pixel, 30Hz
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Length: 10 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 10 | 6.72 | 44.00 | 34.00 | 22.00 | 32,912.00 |
| Packaging Unit Inside | 5 | 3.36 | 35.00 | 19.00 | 29.00 | 19,285.00 |
| Packaging Unit Single | 1 | 0.67 | 7.00 | 17.50 | 23.50 | 2,878.75 |
| Net single without Packaging | 1 | 0.90 | 3.00 | 15.00 | 20.00 | 0.00 |

More images:

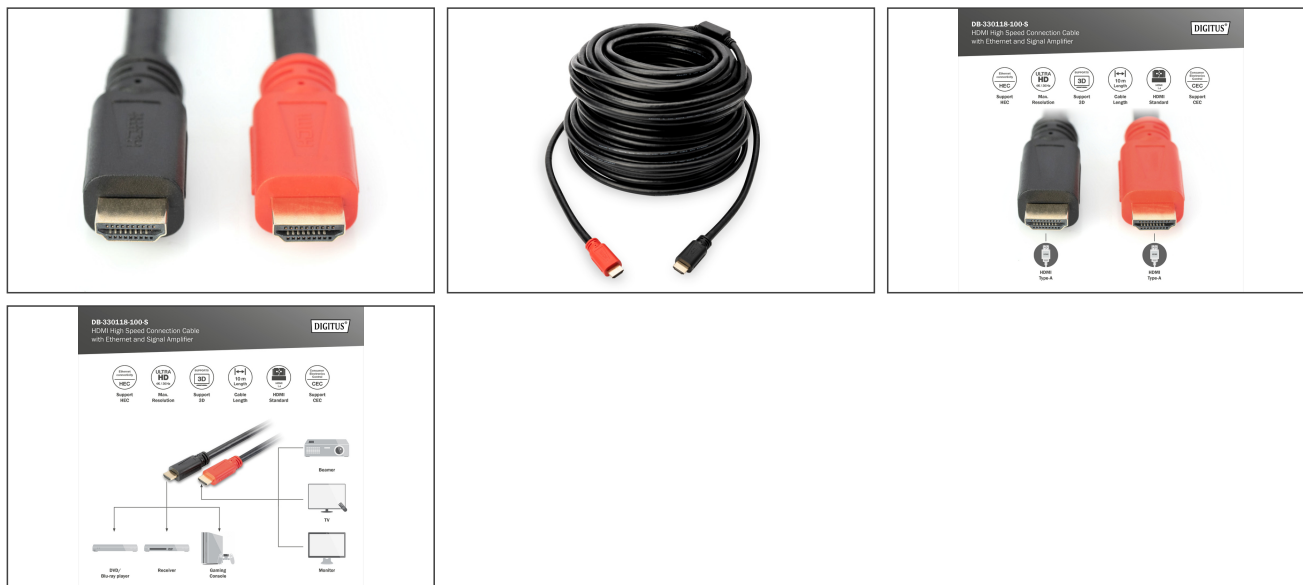

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schöffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com