

DIGITUS Mini DisplayPort Adapter / Converter - Mini DP to DisplayPort, HDMI + DVI

DB-340509-002-W
EAN 4016032468745



DisplayPort Splitter Cable, Type miniDP-DP, HDMI, DVI M/F, 0.2m, Full HD, DP 1.1a, wh

This 3-in-1 cable adapter is ideally suited for connecting a device with Mini DisplayPort interface to a projector, LCD/TFT monitor or LED-TV with DisplayPort, HDMI Type A or DVI interface. The display resolution depends on the connected device. The DisplayPort and HDMI output supports audio transmission for compatible devices. Compatible with all Mini DisplayPort devices. Simultaneous use of the DP, HDMI Type A or DVI data connection is not possible.

3-in-1 Adapter - No need to purchase 3 individual adapters

- Max. supported Video Resolution: 1920 x 1080 p with 60 Hz
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3

Attributes



- AWG: 32
- Color cable: white
- Connector 1: Mini DP, plug
- Connector 2: DP, jack + HDMI type A, jack + DVI-D, jack
- Connector surface: gold-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: none
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Package contents

- 1 x Mini DisplayPort Adapter / Converter - Mini DP to DisplayPort, HDMI + DVI

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 80 | 8.40 | 52.00 | 29.00 | 39.00 | 58,812.00 |
| Packaging Unit Inside | 20 | 2.10 | 27.00 | 27.00 | 17.00 | 12,393.00 |
| Packaging Unit Single | 1 | 0.11 | 2.30 | 7.50 | 23.50 | 405.38 |
| Net single without Packaging | 1 | 0.11 | 2.00 | 6.00 | 20.00 | 0.00 |

More images:

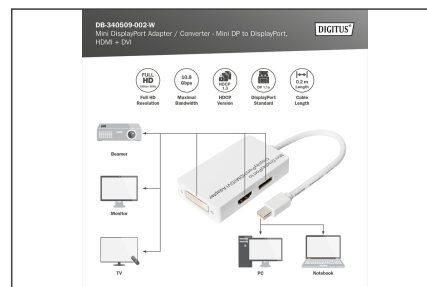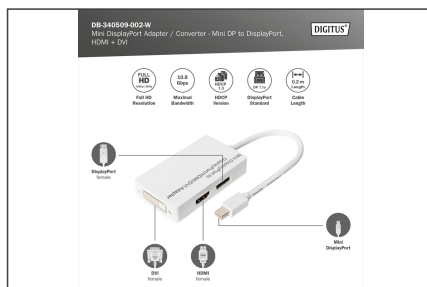

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com