

# DIGITUS USB-C™ Serial Adapter, USB-C™ - RS485

DA-70168  
EAN 4016032473046



### USB Typ-C to RS485 Converter cabel 1m cable length, FTDI chipset

The DIGITUS® USB-C™ serial adapter is a practical solution for serial connectivity. RS485 serial interfaces are no longer available on new hardware, so the DIGITUS® USB-C™ serial adapter enables data exchange between a computer USB-C™ port and peripheral devices with serial interfaces (COM port, RS485). These include, for example, weather stations, sensors, machine control systems, set-top boxes, gaming consoles, PDAs, scanners, modems, ISDN adapters and many other peripheral devices. The USB 2.0 serial adapter is downwardly compatible with USB 1.1 and enables adaptable baud rates of between 75 and 128,000 bits per second. The customizable FTDI FT232RL+SP485 chipset is compatible with all common operating systems and also supports power management and remote wake up. A separate power supply is not required, because the device is powered through the USB connection.

### Provides a serial RS485 interface via USB-C™ port

- Provides a serial RS485 interface via USB-C™ port
- Meets the USB 2.0 standard




- Downward compatibility with USB 1.1
- Adaptable data transfer rates of between 75 and 128,000 bits per second.
- Supports remote wake up and power management
- Chipset: FTDI FT232RL+SP485
- Customizable with the FTDI FT232RL+SP485 chipset
- 1× RS485 plug (Sub D 9-pole) / 1× USB-C™ plug
- Interface: Full duplex
- Gilded contacts
- Incl. USB extension cable, approx. 1 m
- Supports Windows 10, 8.1, 8, 7, Vista, XP, Mac OS X and Linux
- True 3.3V CMOS drive output and TTL input
- USB-C Products: yes

### Package contents

- USB-C™ Serial Adapter, USB-C™ - RS485
- USB extension cable
- Driver CD

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	11.40	32.30	50.50	47.60	77,642.70
Packaging Unit Inside	1	0.11	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.11	20.20	8.60	2.30	399.56
Net single without Packaging	1	0.05	1.50	3.50	100.00	0.00

More images:

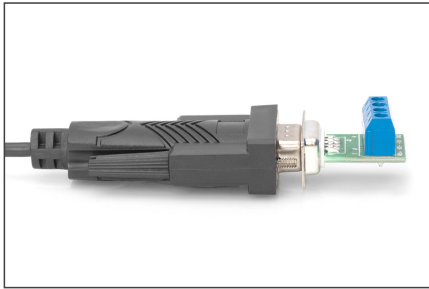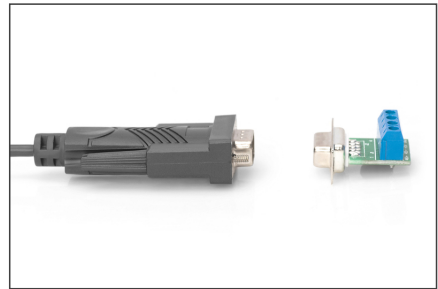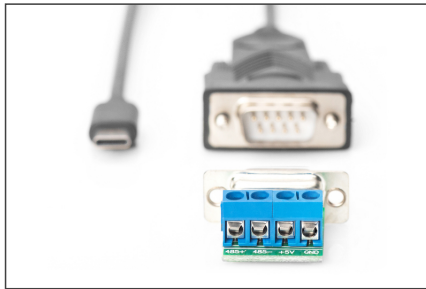

**USB-C™ Serial Adapter,  
USB-C™ - RS485**

