


DIGITUS Local monitored PDU, 1-phase, 18 x C13, 2 x C19

DN-95622
EAN 4016032473404

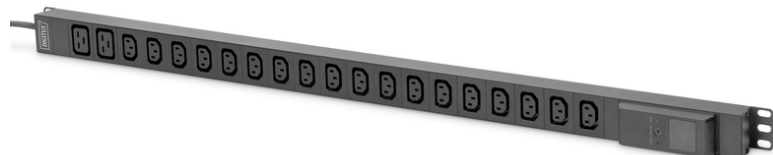

Local monitored PDU, vertical, 250V, 16A, 18x C13, 2x C19 16A ammeter, 16A DIN49441 plug, 3m cable

The DIGITUS® PDU offers you the possibility to measure the electrical input values locally in addition to the efficient power distribution, thus the load distribution can be monitored very easily on site. Equipped with C13 and C19 outputs, the PDU offers a flexible basis for professional power distribution in server and network racks. It is designed for vertical installation, which saves height units and provides more space for additional devices.

Safe and professional power distribution solution with local metering for monitoring loads in network and server racks.

- Input monitoring: current (A) , voltage (V), energy (kWh)
- Local display of measured values via LCD
- Input: Plug Schuko CEE 7/7 1ph/N/PE 230V / 16A
- Output: IEC60320 appliance sockets 18 x C13 (max. 10A per output), 2 x C19 (max. 16A per output)
- Supply line: cable cross-section 1.5 mm², length: 3m
- Dimensions (mm, LxWxH): 983 x 44.4 x 44.4
- Housing length: 930 mm
- Temperature range (operation / storage) : -5°C ~ 45°C / -40°C ~ 70°C

- Humidity range (operation / storage) : 5 ~ 95% RH / 5 ~ 95% RH (non-condensing)
- Maximum altitude, above sea level (operation / storage) : 0 ~ 3.000m / 0 ~ 15.000m
- Approvals: CE conformity
- Scope of delivery: PDU, quick start guide, mounting material

Attributes


- Current: 16 A
- Input Plug: CEE7/7
- Installation: Rack 0U, Desktop
- Metering: PDU Metering
- Outlets: IEC 60320 C13, IEC 60320 C19
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V

Package contents

- 1 x PDU with local energy measurement, 1-phase, 18 x C13, 2 x C19, 3 m cable DIN 49441 16 A plug
- 1 x Fastening material

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10	21.00	25.50	110.00	44.50	124,822.00
Packaging Unit Inside	1	2.10	0.00	0.00	0.00	0.00
Packaging Unit Single	1	2.10	11.50	108.00	8.50	10,557.00
Net single without Packaging	1	1.80	4.40	98.30	4.40	0.00

More images:

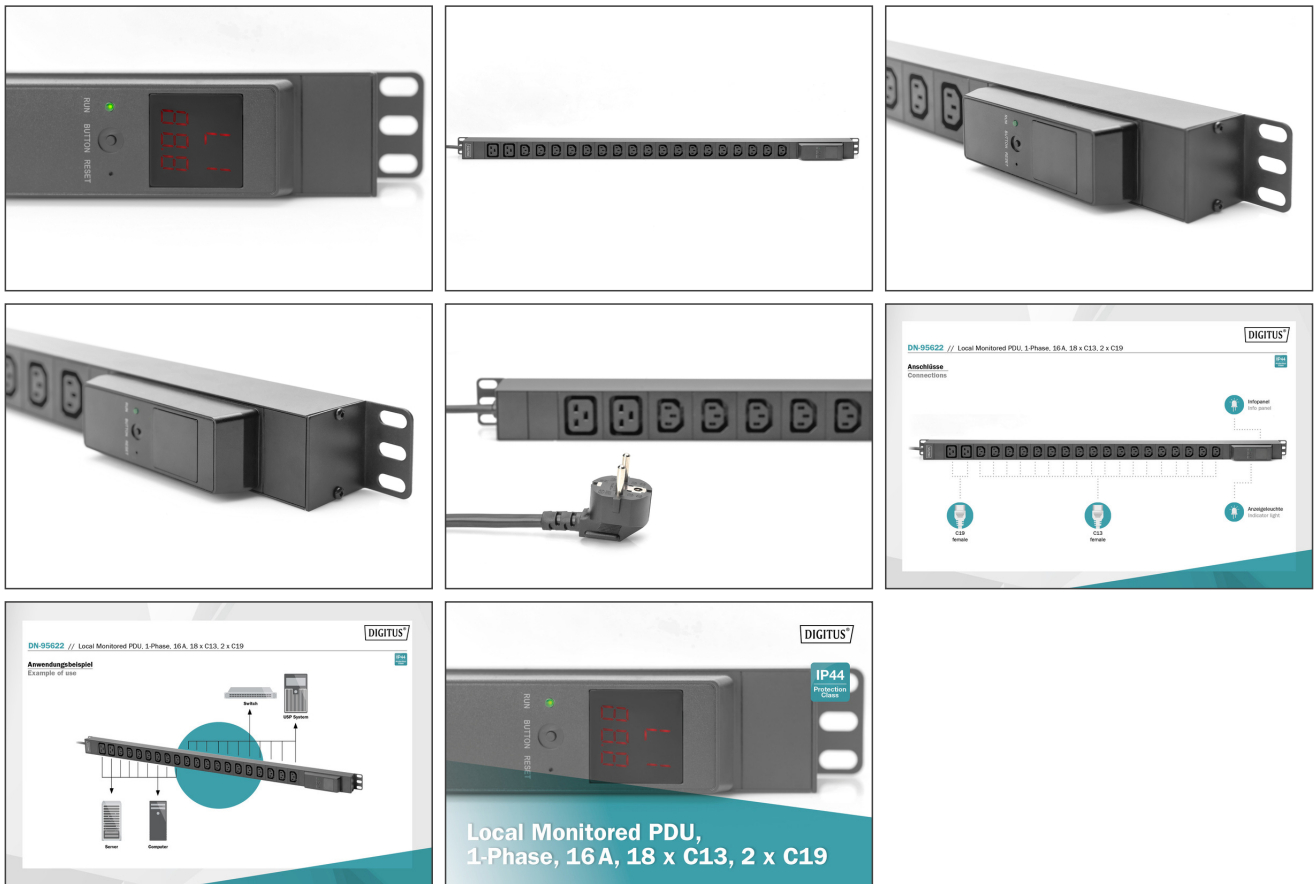

Local Monitored PDU,
1-Phase, 16 A, 18 x C13, 2 x C19

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com