


DIGITUS SFP28 25G 3m DAC Cable

DN-81243
EAN 4016032478805

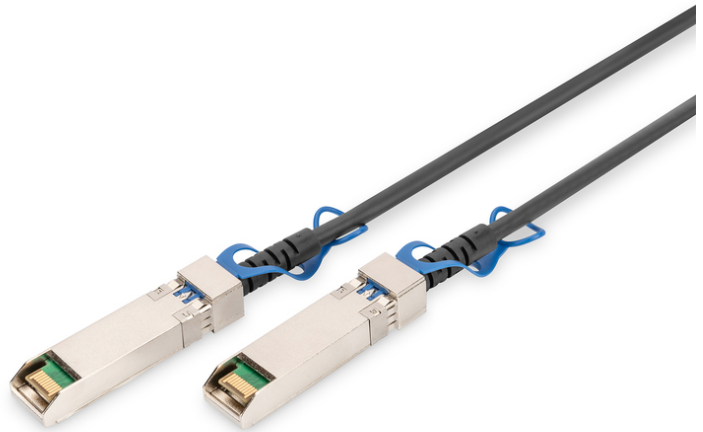

DAC Cable SFP28 3 M DAC Cable 25 G 3m

25G SFP28 DAC Twinax cables are a powerful, energy-saving solution for 25G Ethernet applications, switches, high-performance computer, data acquisition systems and telecommunications systems. It consists of a shielded Twinax copper cable with pluggable connections on both ends. Passive DAC cables have no electrical components in the cable and are suitable for short transmission distances.

The SFP28 25G cable is suitable for connections between two SFP28 ports in 25G network components

- Transmission channels: RX and TX
- Connections: SFP28
- data rates of up to 25.88 Gbps supported
- Temperature range: 0 to 70°C
- Storage temperature range: -40 to 85°C

- Power: +3.3 V supply voltage
- Power consumption: 0.5 W
- Compatible with MSA SFP28
- Electrical interface: 20-pole connector plug
- Management interface: Serial, I²C
- The connection is compatible with the SFF-8432 specification
- Compatible with the following manufacturers: Allnet, CISCO, 3COM, D-LINK, Dell, Edimax, Etherwan, ENTERASYS, EXTREME, FINISAR, FORCE 10, Fortinet, HUAWEI, IBM, JUNIPER, LINKSYS, NETGEAR, NORTEL, RIVERSTONE, ZTE, ZYXEL
- DDM Support: no

Package contents

- SFP28 25G DAC Cable 3 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	100	15.00	48.00	48.00	38.00	87,552.00
Packaging Unit Inside	1	0.15	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.15	26.00	26.00	4.00	2,704.00
Net single without Packaging	1	0.17	5.80	1.40	1.10	0.00

More images:

