


# DIGITUS SFP28 25G 3m DAC Cable

DN-81243  
EAN 4016032478805

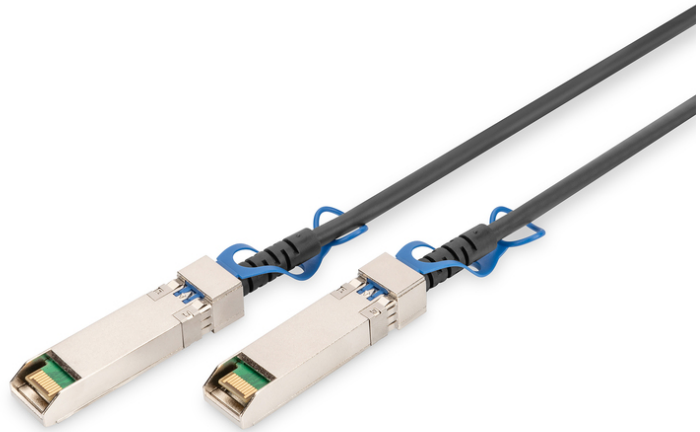

### DAC Cable SFP28 3 M DAC Cable 25 G 3m

25G SFP28 DAC Twinax cables are a powerful, energy-saving solution for 25G Ethernet applications, switches, high-performance computer, data acquisition systems and telecommunications systems. It consists of a shielded Twinax copper cable with pluggable connections on both ends. Passive DAC cables have no electrical components in the cable and are suitable for short transmission distances.

#### The SFP28 25G cable is suitable for connections between two SFP28 ports in 25G network components

- Transmission channels: RX and TX
- Connections: SFP28
- data rates of up to 25.88 Gbps supported
- Temperature range: 0 to 70°C
- Storage temperature range: -40 to 85°C

- Power: +3.3 V supply voltage
- Power consumption: 0.5 W
- Compatible with MSA SFP28
- Electrical interface: 20-pole connector plug
- Management interface: Serial, I<sup>2</sup>C
- The connection is compatible with the SFF-8432 specification
- Compatible with the following manufacturers: Allnet, CISCO, 3COM, D-LINK, Dell, Edimax, Etherwan, ENTERASYS, EXTREME, FINISAR, FORCE 10, Fortinet, HUAWEL, IBM, JUNIPER, LINKSYS, NETGEAR, NORTEL, RIVERSTONE, ZTE, ZYXEL
- DDM Support: no

#### Package contents

- SFP28 25G DAC Cable 3 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	100	15.00	48.00	48.00	38.00	87,552.00
Packaging Unit Inside	1	0.15	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.15	26.00	26.00	4.00	2,704.00
Net single without Packaging	1	0.17	5.80	1.40	1.10	0.00

#### More images:

