


DIGITUS 25G DAC Cable SFP28 2m

DN-81242
EAN 4016032479499

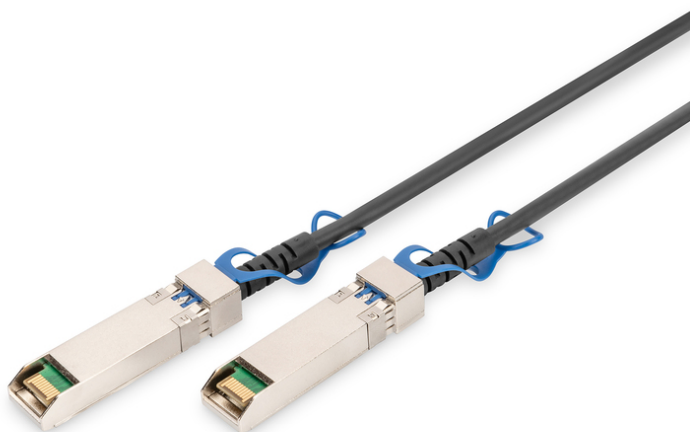

DAC Cable SFP28 2 M DAC Cable 25 G 2m

DIGITUS® 25G SFP28 Passive Direct-Attach Copper Twinax Cable are a high-performance, energy-saving, short-range connectivity solution 25G Etherne application, switches, high performance computer, data storage arrays and telecom system. It consists of a shielded twinax copper cable with pluggable connectors on either end. Passive DAC cable have no electrical components built into the cable assembly and recommend for short transmission distance. Typically 1~2m and max. 5m lengths.

It is suitable for short reach connection between two SFP28 ports in 25G interconnecting networking applications.

- Number of Lanes : Tx & Rx
- Connector Type: SFP28 to SFP28
- Channel Data Rate: 25.88243 Gbps
- Operating Temperature: 0 to +70°C

- Storage Temperature: -40 to +85°C
- Supply Voltage: 3.3V nominal
- Power consumption less than 0.5W
- Compliant with MSA SFP28
- Electrical Interface: 20 pins edge connector
- Management Interface: Serial, I²C
- Connector is compatible with SFF-8432 specification
- Compatible with Allnet, CISCO, 3COM, D-LINK, Dell, Edimax, Etherwan, ENTERASYS, EXTREME, FINISAR, FORCE 10, Fortinet, HUAWEI, IBM, JUNIPER, LINKSYS, NETGEAR, NORTEL, RIVERSTONE, ZTE, ZYXEL
- DDM Support: no

Package contents

- SFP28 25G DAC cable 2 m

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 100 | 15.00 | 48.00 | 48.00 | 38.00 | 87,552.00 |
| Packaging Unit Inside | 1 | 0.15 | 0.00 | 0.00 | 0.00 | 0.00 |
| Packaging Unit Single | 1 | 0.15 | 26.00 | 26.00 | 4.00 | 2,704.00 |
| Net single without Packaging | 1 | 0.17 | 5.80 | 1.40 | 1.10 | 0.00 |

More images:

