

# DIGITUS KVM Switch, 2 Port, 4K30Hz, USB-C/USB/HDMI in, HDMI out, Network

DS-12901  
EAN 4016032479987



### 2port Type C KVM with Network Port

The DIGITUS® 2-port KVM switch with USB-C™ and network connectivity gives you the ability to control two 4K-capable PCs from a single USB keyboard and mouse. Conveniently switch between the two PCs at the touch of a button, eliminating the need to reconnect all cables. The Gigabit network port provides convenient access to the network via the additional USB-C™ port. The output to a monitor is done via the integrated HDMI output. Audio signals from the microphone and speakers can also be switched. In addition, another USB-C™ port and two USB A (2.0) ports are available on the front, which can be used for further peripherals such as USB sticks or external hard drives. Status LEDs on the front of the switch show you the current status at all times. The slim switch is rounded off by the robust metal housing.

**New generation KVM switch support USB-C™ notebook computer** It provides USB console, HDMI display, Hub, network and power to USB-C™ notebook computer via 1 USB-C™ cable .

- Inputs: 1 x HDMI computer, 1x USB-C™ computer, 1 x Gigabit network (RJ45), 2 x USB A (keyboard, mouse), 1x USB-C™ power ( optional)
- Output: 1 x HDMI video
- Additional connections on the front: 2 x USB A 2.0, 1 x audio input, 1 x audio output , 1 x USB-C™ ( for USB-C™ computer only)
- Provide LAN connection to USB-C™ notebook computer via USB-C™ cable



- Audio in/out: 3.5 mm audio jacks
- LED status indicator on front: 2 x, shows active computer
- Switch: Switching PC1 / PC2
- Switching time: 0.2s
- HDMI® version: 1.4
- HDCP version: 1.4/2.2
- UHD resolution: 3840 x 2160p / 30 Hz
- Subsampling: YCbCr 4:4:4/ YCbCr 4:2:2/ YCbCr 4:2:0
- Bandwidth HDMI: 10.2 Gbps all channels (3.4 Gbps per channel)
- Color depth HDMI®: 24/36 bit (all channels).
- Power supply via USB-C™port on the rear panel ( Optional )
- USB-C Power delivery : 20 V / 5 A / 100 W max.
- Operating temperature: 0°C ~ 50°C
- Storage temperature: -20°C ~ 60°C
- Operating humidity: 0% - 80% RH (non-condensing)
- housing material: metal
- dimensions: 150 x 88 x 26 mm (WxDxH)
- Weight: 400 g
- Color: Black

### Package contents

- 1 x KVM-Switch, 2-Port, HDMI , USB-C
- 1 x QIG
- 1 x KVM Cables 1.2m
- 1 x USB-C calbe 0.5m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	0.80	21.00	49.50	53.50	55,613.20
Packaging Unit Inside	1	0.04	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.04	13.00	19.80	9.80	2,522.52
Net single without Packaging	1	0.40	8.80	15.00	2.60	0.00

More images:

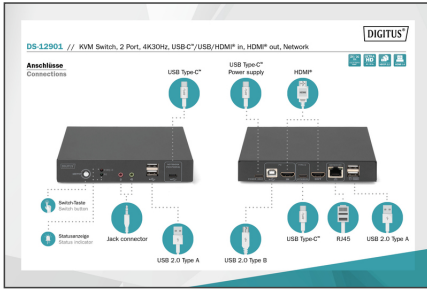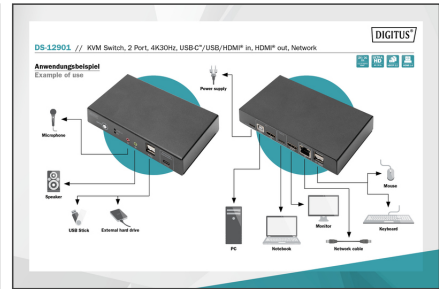

**Safety notes**

- Overloading can lead to overheating and damage to the appliance or the connected peripherals.
- If necessary, use an external power supply to ensure stable performance.
- If devices such as external hard disks or printers that require a high power consumption are connected, the device should be used with an external power supply. Otherwise, the device could be overloaded or functional problems could occur.
- Do not expose the device to rain, moisture, vapors or liquids.
- Do not insert any objects into the device.
- Do not attempt to repair the unit or open the housing without authorization. You risk an electric shock!
- Ensure adequate ventilation to prevent damage due to overheating.
- Dust, moisture, vapors and strong cleaning agents or solvents can cause damage to the device.
- Disconnect the appliance from the power supply and the connected devices before cleaning.
- Clean the device with a dust-free cloth.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.  
 ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)