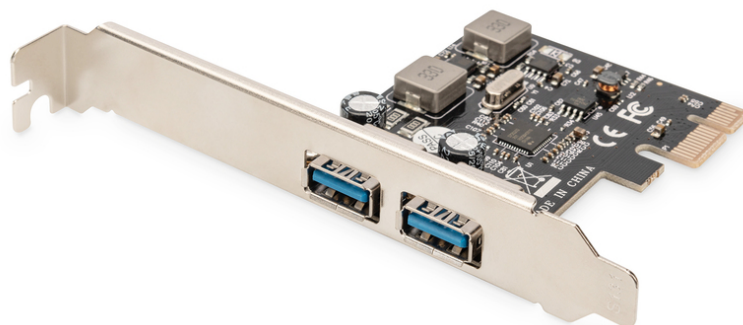


# DIGITUS USB 3.0, 2-Port, PCI Express Add-On card

**DS-30220-5**  
**EAN 4016032480532**



**USB PCI Express Add-On card USB3.0, 2-port A/F, 1x LP bracket, NEC UPD720202**

Looking for a quick and easy way to add USB 3.0 to your computer? Well, look no further, DIGITUS takes care of it. The DIGITUS® USB 3.0 PCI Express extension card features two USB 3.0 Type A downstream connectors that can deliver transfer rates of up to 5 Gbps!

**The performance boost for the new generation of ultra fast USB peripherals**

- 2 x USB 3.0 Ports
- Chipset: NEC UPD720202
- Downward compatible to USB 2.0/1.1 devices
- Supported data transfer rates: Super-Speed (5Gbps), High-Speed (480Mbps), Full-Speed (12Mbps) and Low-Speed (1.5Mbps)
- Supports plug and play and hot swapping
- Compliant with universal serial bus 3.0 specification revision 1.0

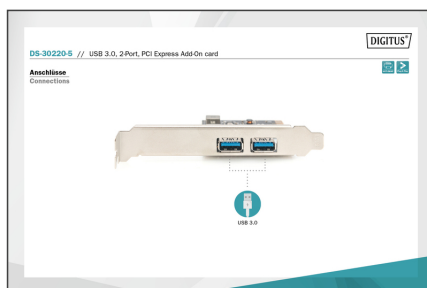
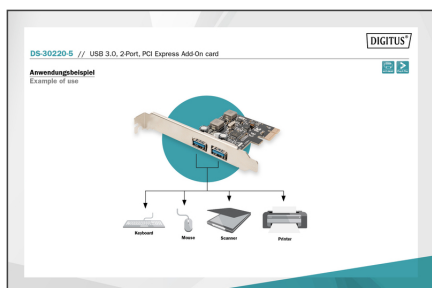
- Compliant with PCI-Express base specification 2.0; bus interface: PCI-Express x 1
- Supports PCI bus power management interface specification revision 1.2
- Incl. low profile bracket
- Operating temperature: 0 °C - 85 °C
- Operating humidity: 25% - 65% RH (non-condensing)
- Supports Windows 8, 7, Vista and XP, 10, 11
- Microsoft certified WHQL drivers for Windows 7 32/64-bit, Vista 32/64-bit and XP 32/64-bit

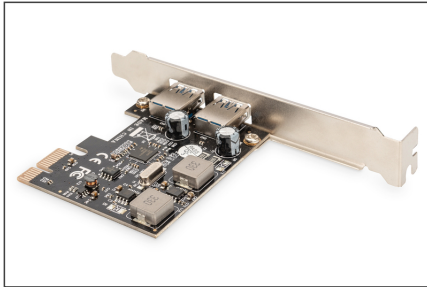
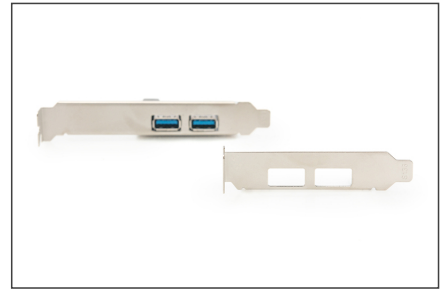
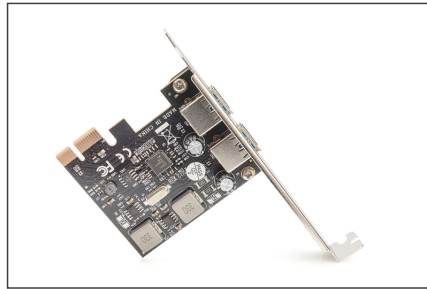
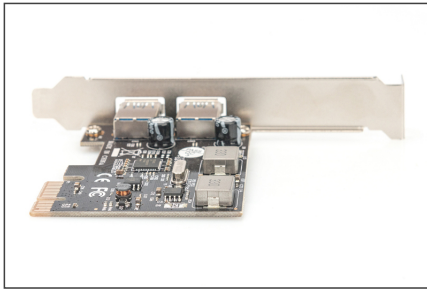
**Package contents**

- USB 3.0 2 port PCI Express Card
- Low profile bracket
- Driver CD
- Manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	40	5.00	38.00	28.00	30.00	31,920.00
Packaging Unit Inside	1	0.13	6.00	18.00	18.00	1,944.00
Packaging Unit Single	1	0.13	3.00	13.00	14.00	546.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

**More images:**



**Safety notes**

- Switch off the computer completely and disconnect it from the power supply before installing or removing the network card.
- Static discharge can damage the product or the PC. Take measures against static discharge (ESD) when installing the product, e.g. wear an antistatic wrist strap.
- Before installation, touch the metal surface of the PC housing or another grounded object to ground any ESD charge via the housing.
- Avoid using too much force when connecting the product to the PC.
- Please ensure that any cables are connected correctly without overstretching or damaging them.
- Avoid touching the contacts of the product with your fingers to prevent corrosion or static charge.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)