


DIGITUS Cat.7 S/FTP installation cable, 50 m, simplex, Dca-s1a d1 a1

DK-1743-VH-050
EAN 4016032480785

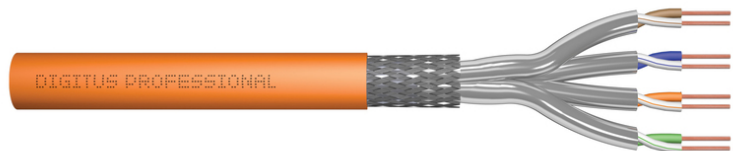

CAT 7 S-FTP installation cable, 1200 MHz Dca (EN 50575), AWG 23/1, 50m ring, SX, orange

Adequado para a construção de cablagem estruturada na área secundária e terciária.

Melhor desempenho e melhor qualidade de ligação com a rede.

- Número total de condutores isolados: 8, entrançados em 4 pares
- Código de cor: azul-branco, laranja-branco, verde-branco, castanho-branco

- Blindagem dos pares individuais: folha em poliéster oculta em alumínio, cobre 100%
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 50 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	2.60	32.00	32.00	9.00	9,216.00
Packaging Unit Inside	1	2.60	32.00	32.00	9.00	9,216.00
Packaging Unit Single	1	2.60	32.00	32.00	9.00	9,216.00
Net single without Packaging	1	0.00	12.00	24.00	80.00	0.00

More images:





DIGITUS

AWG 23/1 | 1200 MHz | 10 Gbit Ethernet | CAT 7 | LSZH | Dca GPR class

CAT 7 S/FTP Installation Cable, 50 m, Simplex, D_{ca}

DIGITUS

DK.1743-VH-050 // CAT 7 S/FTP Installation Cable, 50m, Simplex, D_{ca}

Anwendungsbeispiel
Example of use

DIGITUS

DK.1743-VH-050 // CAT 7 S/FTP Installation Cable, 50m, Simplex, D_{ca}

Kabelquerschnitt
Cable cross-section

Labels: Außenmantel Data shield, Abschirmung Twisted pair, Selbstschirmung Data shield, Cu-Dräht Cu/Al, Abschirmung Twisted pair, Parastreifung Twisted pair.

DIGITUS

Produktinformation Product Information

Elektrische Eigenschaften Electrical Properties

Mechanische Eigenschaften Mechanical Properties

DIGITUS

Leitungsparameter-Transmissions Properties

PROZ.	FTT	NEXT	PSNEXT	ACR	PSACR	RL	EXTFEXT	PSEXTFEXT
1	7	75	75	75	75	20	20	20
30	13	78	78	78	78	20	20	20
100	10.1	79.1	79.1	79.1	79.1	20.1	20.1	20.1
300	9	80.3	80.3	80.3	80.3	17.3	17.3	17.3
500	8.3	81.9	81.9	81.9	81.9	17.3	17.3	17.3
800	8.1	82.9	82.9	82.9	82.9	17.3	17.3	17.3
1000	8.0	83.4	83.4	83.4	83.4	17.3	17.3	17.3
1500	7.9	83.7	83.7	83.7	83.7	17.3	17.3	17.3

DIGITUS

Certificate No. 154133-13-0
Zertifikat Nr. 154133-13-0

Category 7

GHMT Type Approval

DIGITUS

Certificate No. 154133-13-0
Zertifikat Nr. 154133-13-0

Class S

GHMT Type Approval

DIGITUS

GHMT Systeme

Bestandteile: B2ca, Cca, Dca, Eca

Leitungsparameter (dB): 1+

Abgaben der verschiedenen Bauteile (Point of insertion loss): 3

Zusammenfassung der Bauteileigenschaften (Summary of component properties): S, d, a

Resultat (Result): Cca, s1a, d1, a1



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com