


DIGITUS Cat.7 S/FTP installation cable, 250 m, simplex, Dca-s1a d1 a1

DK-1743-VH-250
EAN 4016032480792

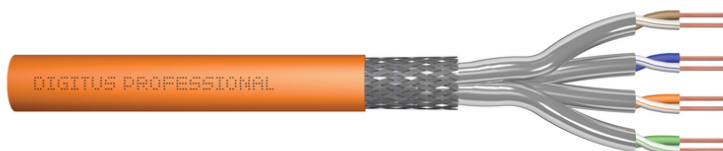

CAT 7 S-FTP Installationskabel, 1200 MHz Dca (EN 50575), AWG 23/1, 250 m box, SX, orange

The Digitus® Cat.7 S/FTP installation cable features the following cable structure 4x2x AWG23/1 and reaches a transmission frequency of up to 1200 MHz. The halogen-free cable sheath complies with the IEC 60332-3-24 standard, FRNC-C, LSZH-3, and BauPVO Euroclass Dca. The cable is suitable for structured building cabling in secondary and tertiary areas. Compliant with ISO/IEC 11801, DIN EN 50173, and DIN EN 50288-4-1 standards.



Future-oriented standards and high-end quality for your network.

- Conductor: Bare copper wire, AWG 23/1
- System(s) of assessment and verification of constancy of performance: System 3
- Insulation: SFS-PE (foamed polyethylene jacket)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: aluminum-laminated polyester film, covers 100%
- Overall shielding: copper braiding
- Outer sheath: Eca to B2ca in accordance with EN 50575; LSZH
- Outer sheath thickness (nominal): 0.50 mm (Eca); 0.52 mm (Dca); 0.60 mm (Cca); 0.60 (B2ca)
- Color: Orange (RAL 2008)
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +75 °C
- Operating temperature range: -20 °C to +50 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter simplex (nominal): 7.0 mm (Eca); 7.2 mm (Dca); 7.5 mm (Cca); 7.5 mm (B2ca)

- Weight (kg/km): 49.5 kg (Eca); 51 kg (Dca), 53 kg (Cca); 53 kg (B2ca)
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 1000 MHz; 100±25 OHM @ 100-600 MHz
- Capacitance: 45pF/m nom. at 1KHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 95 Ohm/km max. (2% max. unbalanced resistance)
- Loop resistance: 190 Ohm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 1b
- Phase delay: 450 nS/100 m max.
- Time delay: 10 nS/100 m max.
- Separation class: "d" according to EN 50174-2
- NVP: 79%
- Assortment: Twisted pair installation cable
- Length: 250 m
- Category: CAT 7
- Color: orange
- CPR: Dca
- Coat: LSOH
- Shielding: S-FTP, pairs shielded in metal foil and braid
- Cable construction: 4 x 2 AWG 23/1, solid twisted pair
- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Dca
- Length: 250 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	15.19	40.00	40.00	30.00	48,000.00
Packaging Unit Inside	1	15.19	40.00	40.00	30.00	48,000.00
Packaging Unit Single	1	15.19	40.00	40.00	30.00	48,000.00
Net single without Packaging	1	13.98	20.00	38.00	27.20	0.00

More images:

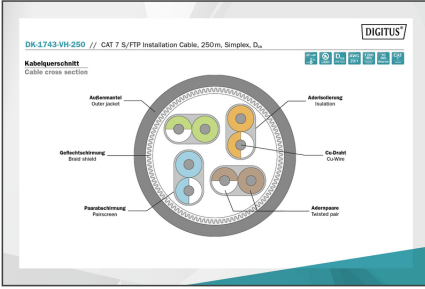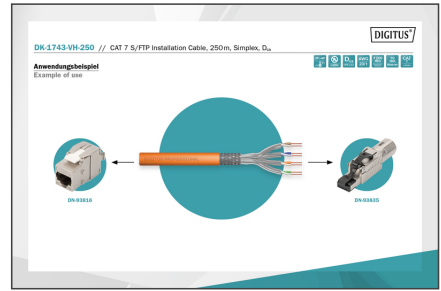

Technical specifications table including Product Information, Physical Specifications, Electrical Properties, and Mechanical Properties.

Table of cable lengths and corresponding dimensions in meters and feet.

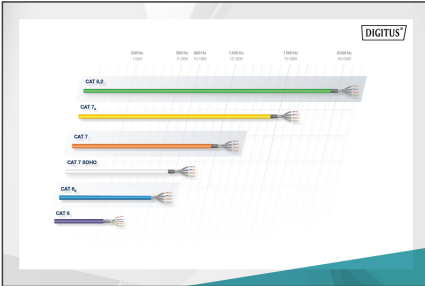


Table detailing cable construction and performance characteristics, including cable construction, shielding, and fire safety.

